# **PHILIPS** Lighting

## MASTER LEDtube EM/ Mains T8

### MAS LEDtube 1200mm HO 12.5W 840 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

#### Warnings and Safety

• NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

#### Product data


eneral Information		Luminous Efficacy (rated) (Nom)	168 lm/W		
Cap-Base	G13 ROT (Rotating) [Medium Bi-Pin	Color Consistency	<6		
	Fluorescent]	Color rendering index (CRI)	80		
Nominal lifetime	75,000 hour(s)	LLMF At End Of Nominal Lifetime (N	LLMF At End Of Nominal Lifetime (Nom) 70 %		
Switching Cycle	200,000				
Lighting Technology	LED	Operating and Electrical			
Flux measurement reference	Sphere	Line Frequency	50 to 60 Hz		
		Input Frequency	50 to 60 Hz		
Light Technical		Power Consumption	12.5 W		
Color Code	840 [CCT of 4000K]	Starting Time (Nom)	0.5 s		
Beam Angle (Nom)	160 degree(s)	Warm-up time to 60% light	0.5 s		
Luminous Flux	2,100 lumen	Power Factor (Fraction)	0.9		
Color Designation	Cool White (CW)	Voltage (Nom)	220-240 V		
Correlated Color Temperature (Nom)	4000 K				

#### MASTER LEDtube EM/Mains T8


Temperature					
Ambient temperature range	-20 °C to 45 °C				
T-Case Maximum (Nom)	50 °C				
Controls and Dimming					
Dimmable	No				
Mechanical and Housing					
Bulb Finish	Frosted				
Bulb Material	Plastic				
Product Length	1,200 mm				
Bulb Shape	Tube, double-ended				
Approval and Application					
Energy Saving Product	Yes				
Approval Marks	RoHS compliance TUV CE marking KEMA Keur				
	certificate				

Energy Consumption kWh/1000 h	13 kWh			
EPREL Registration Number	1,206,967			
CE mark	Yes			
EU RoHS compliant	Yes			
Product Data				
Full product code	871869959237000			
Order product name	MAS LEDtube 1200mm HO 12.5W 840 T8			
Order code	929001922702			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material number (12NC)	929001922702			
Full product name	MAS LEDtube 1200mm HO 12.5W 840 T8			
EAN/UPC - Case	8718699592387			

#### Dimensional drawing




#### Photometric data



dips Lighting S


Product	D1	D2	A1	A2	A3
MAS LEDtube 1200mm HO 12.5W	25.8 mm	28 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm
840 T8					

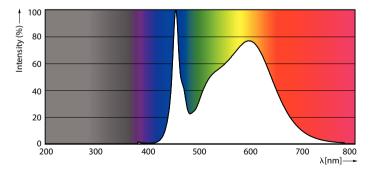

Spectral Power Distribution Colour - MAS LEDtube 1200mm HO 12.5W 840 т8


#### MASTER LEDtube EM/Mains T8

#### Photometric data



Light Distribution Diagram - MAS LEDtube 1200mm HO 12.5W 840 T8


#### Lifetime

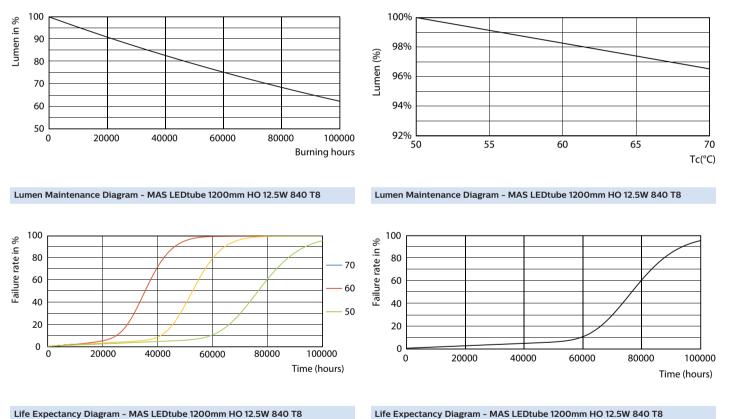



#### MASTER LEDtube EM/Mains T8

Lifetime

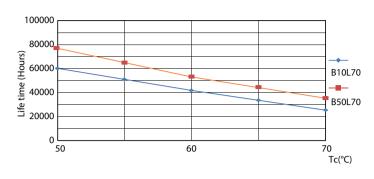

Life Expectancy Diagram - MAS LEDtube 1200mm HO 12.5W 840 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 22 - data subject to change