
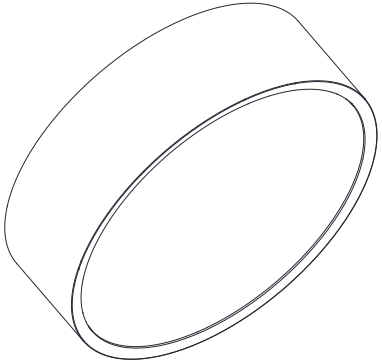



## LED Ceiling Light Luna Ecomax

Item Code	CCT	kg
540001295100	3000K	0.102Kg
540001295500	3000K	0.102Kg
540001295300	4000K	0.102Kg
540001295600	4000K	0.102Kg
540001295200	3000K	0.166Kg
540001295700	3000K	0.166Kg
540001296400	4000K	0.166Kg
540001295800	4000K	0.166Kg
540001295300	3000K	0.269Kg
540001295900	3000K	0.269Kg
540001296500	4000K	0.269Kg
540001296000	4000K	0.269Kg
540001295400	3000K	0.269Kg
540001295100	3000K	0.269Kg
540001296600	4000K	0.269Kg
540001296200	4000K	0.269Kg

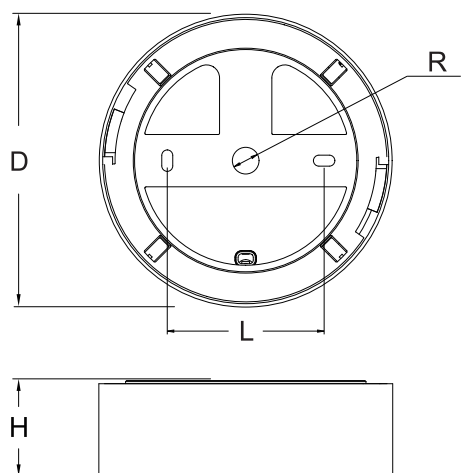



Type	H(mm)	D(mm)	R(mm)	L(mm)
LED-CL-E RD87-9W	45	φ87	φ10.2	56
LED-CL-E RD112-14W	45	φ112	φ10.2	60
LED-CL-E RD142-18W	45	φ142	φ10.2	90
LED-CL-E RD142-24W	45	φ142	φ10.2	90



A suitable size of outlet box with internal 2-way terminal blocks which conform to EN60998-2-1 or EN60998-2-2 must be used, more specification about terminal block as below:  
Screw terminal block with box, 450V 5A, 0.75-2.5mm<sup>2</sup>.

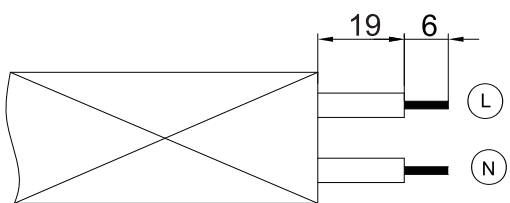

①



2 × 0.75mm<sup>2</sup>

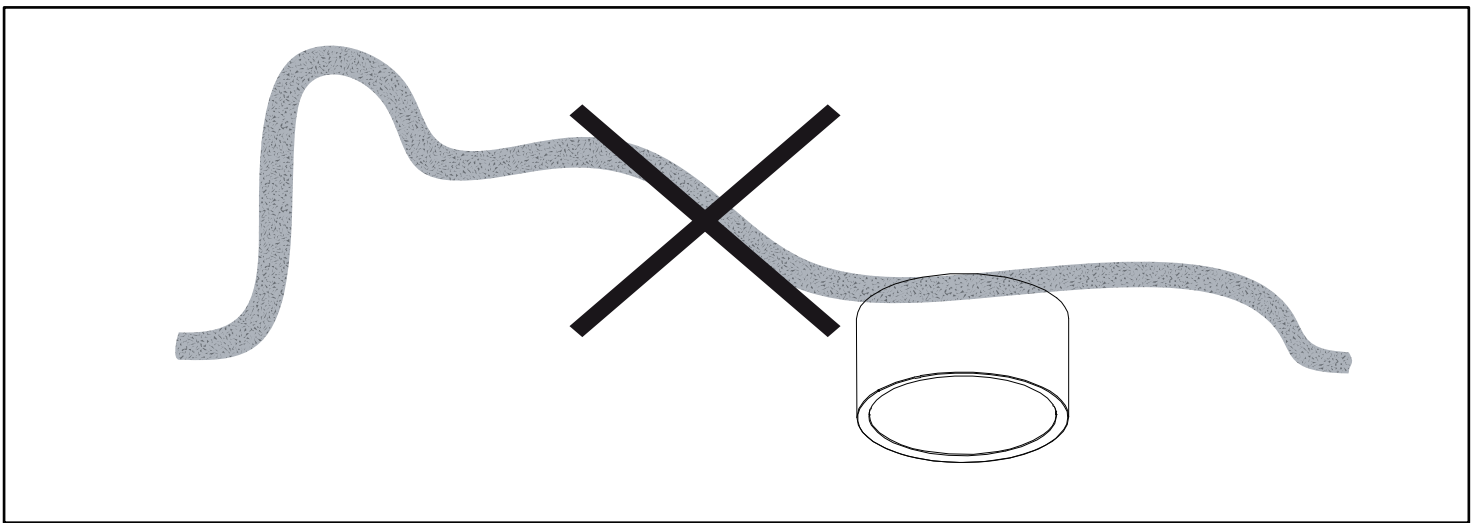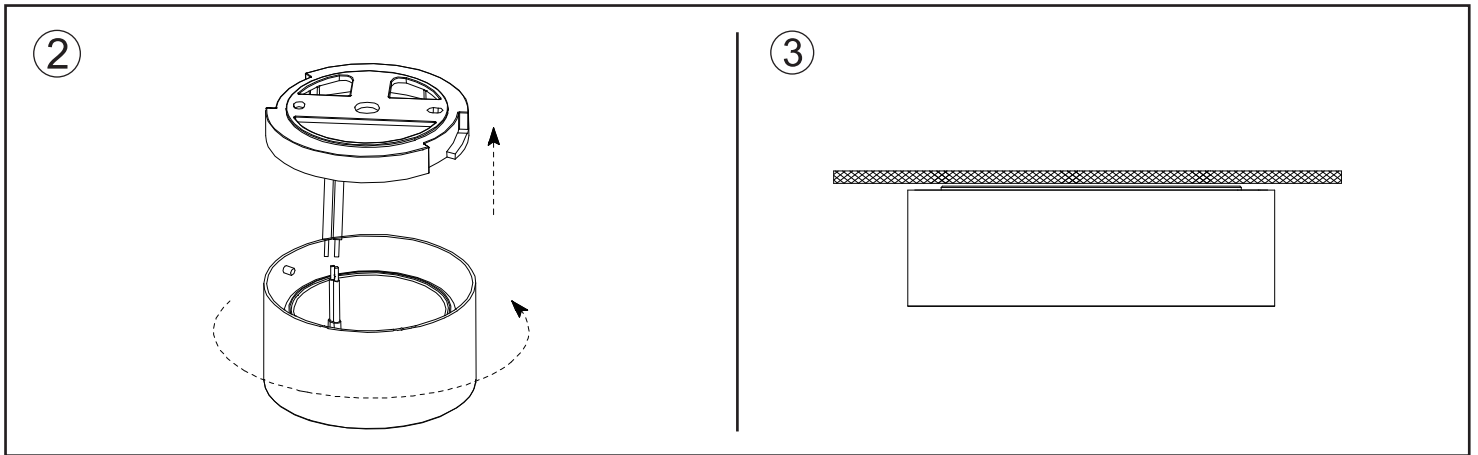


The external flexible cable or cord of this luminaire cannot be replaced; If the cord is damaged, the luminaire shall be destroyed.

Terminal block not included. Installation may require advice from a qualified person.

Input Voltage:220-240V~50/60Hz

Luminaires not suitable for covering with thermally insulating material.

Caution:Any operation is forbidden while power is on.



For non-replaceable light sources:

The light source of this luminaire is not replaced; When the light source its end of life the whole luminaire shall be replaced.

This product contains a light source of energy efficiency class <F>.

