


# Marlo Bi-directional Suspended Linear



- Aluminium bi-directional suspended pendant suitable for commercial applications
- Supplied bi-directional light output as standard (directional only option can be selected if required)
- High output, high efficiency 90° lens technology offers optimum glare control and comfort for task / office applications.
- Pre-wired with 2 metre cable
- Adjustable suspension points c/w suspension kit
- Powered by Tridonic

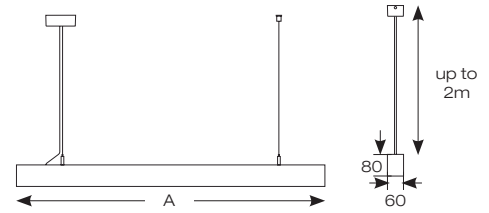

Top View



Reflector lens design ensures reduced glare and visual comfort



Integral switch allows installer the option of both bi-directional and/or directional light output

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50/60Hz	0°C to 25°C	L80 B50 36,000	Ra 90	3	90°	1	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	A	TRADE
AMARLED4/CW	1200mm - Cool White	38W	4000K	3730lm	98lm	16	1140mm	£244.00
AMARLED4/WW	1200mm - Warm White	39W	3000K	3350lm	86lm	15	1140mm	£244.00
AMARLED5/CW	1500mm - Cool White	54W	4000K	4750lm	88lm	13	1700mm	£312.00
AMARLED5/WW	1500mm - Warm White	54W	3000K	4470lm	83lm	13	1700mm	£312.00

\* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE
/DD	Digital Dimming (DD1/DD3)	+ £95.00

