

# Signaling units

Ø 84 - 130

Harmony<sup>®</sup> XVR rotating beacons

Catalog

April 2018



# Quick access to Product information

## Select your Catalog, your Training

### Digi-Cat

The complete digital catalog for industrial automation



Makes your choice easy every day, everywhere!



With just 3 clicks, you can reach the 7,000 pages of the Industrial Automation & Control catalog, in both English and French.

- Digi-Cat is available on a USB key (for PC). To get your Digi-Cat, please contact your local center
- Download Digi-Cat from this address:


<http://digi-cat.schneider-electric.com/download.html>



### Find your training

- Find the right training for your needs
- Locate the training center with the selector tool, using this address:

<http://www.schneider-electric.com/b2b/en/services/training/technical-training.jsp>

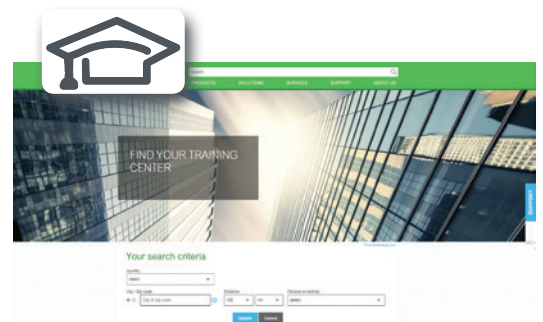

then click on

Find your training center

Life Is On



# General contents

## Harmony® XVR rotating beacons

■ General presentation.....	page 2
<i>Selection guide</i> .....	<i>page 4</i>
■ Presentation	
□ Rotating beacons, Ø 84, 106, 120, and 130.....	page 8
□ Motor-less rotating beacons, Ø 100.....	page 9
■ References	
□ Pre-cabled rotating beacons.....	page 10
□ Accessories for rotating beacons.....	page 10
□ Pre-cabled motor-less rotating beacons .....	page 11
□ Accessories for motor-less rotating beacons .....	page 11
■ Product reference index.....	page 12

# Signaling units

Rotating beacons

Harmony XVR

Ø 84, Ø 106, Ø 120, Ø 100, and Ø 130  
(equipped with Super Bright LED)

## Revolutionary technology for Harmony® XVR motor-less rotating/flashing beacons



The Harmony XVR range of rotating beacons is commonly used in a wide range of applications. They are visual and audible signaling units that offer a combination of innovative features, high performance, and simplicity.

- > Available in various diameters to suit different industrial applications (Ø 84/3.31 in., Ø 106/4.17 in., Ø 120/4.72 in., Ø 130/5.12 in., and Ø 100/3.94 in.)
- > Easy installation due to pre-cabled and pre-assembled products
- > With or without buzzer, available in four colors: red, orange, green, and blue



## Ø 100 motor-less rotating/flashing beacons

### Better performance

- > Longer life and free maintenance thanks to motor-less LED technology
- > Excellent LED flashing mode with different frequencies to provide more possibilities
- > High degree of protection and vibration resistance to increase reliability
- > Wide voltage input to meet different applications



Addition of motor-less beacons to the Harmony XVR range

### Flexibility and simplicity

- > 10 lighting modes in one switch makes it easy to use, simple to select, and helps reduce the levels of stock required
- > Flexibility of straight and side wiring
- > Simple and easy installation without use of any tools
- > External buzzer volume adjuster



Easy light mode selector with use of simple tool



10 lighting mode selector in Ø 100 beacon

## Signaling units

Rotating beacons

Harmony XVR

Ø 84, Ø 106, Ø 120, Ø 100, and Ø 130  
(equipped with Super Bright LED)

### Motor-less rotating/flashing beacons (continued)

#### Aesthetic design for industrial applications

- > Available in 4 colors: green, red, orange, and blue
- > Unique aesthetic design distinguishes them from other beacons
- > Faceted lens extends the lighting area giving a unique appearance



reddot award  
product design

2014 Red Dot industrial  
design award winner for  
unique aesthetic design



#### Robustness

- > Integrated rubber base to improve the IP level
- > Up to IP 65 degree of protection depending on buzzer option, and high vibration resistance of 7.1G
- > CE certified and RoHS compliant



Designed in conformity  
with requirements of the  
European RoHS  
Directive 2011/65/EU



#### → Industrial applications

Ideally suited for automotive, machine tools, material handling, and electronic equipment applications.



Factory  
applications



Construction  
vehicles



Public  
areas





Harmony type XV **Monolithic tower lights**



<b>Type of products</b>	Pre-assembled and pre-cabled USB tower lights	Pre-assembled/pre-cabled tower lights Variable composition tower lights for customer assembly of up to 4 units
<b>Diameter</b>	Ø 60 mm/2.362 in.	Ø 60 mm/2.362 in.
<b>Degree of protection conforming to IEC 60529</b>	IP 54	IP 53 and IP 42 (base mounting) IP 23 (direct aluminium tube mounting, aluminium tube mounting and "L" bracket) IP 53 and IP 42 (aluminium tube mounting and fixing plate) IP 40 (aluminium tube mounting and foldable bracket)
<b>Type of signalling</b>	Steady Flashing "Flash" Sound	Yes Yes – – With buzzer (volume control and alarm type can be set with HMI)
<b>Light sources</b>	Incandescent bulb LED bulb Integral LED "Flash" discharge tube Halogen bulb	– – Yes – –
<b>Colors of illuminated units</b>	Multi-color LEDs (many possible combinations can be set with HMI) <input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Green <input type="checkbox"/> Blue	<input type="checkbox"/> Red <input type="checkbox"/> Green <input type="checkbox"/> Amber <input type="checkbox"/> Blue
<b>Connection</b>	USB power cable: - 300 mm/11.81 in. for tube mounting - 400 mm/15.75 in. for direct mounting	Flying leads, length 500 to 560 mm/19.68 to 22.05 in. for tube mounting according to model. Length 900 mm/35.43 in. for base mounting.
<b>Support panel drilling or cut-out</b>	Mounting on support tube with fixing plate: 4 x Ø 6 mm/0.236 in. Direct mounting on horizontal support: 3 x Ø 5 mm/0.197 in.	Base mounting: 3 x Ø 5 mm/0.197 in. Direct aluminium tube mounting: Ø20/0.787 in. Aluminium tube mounting and "L" bracket: 2 x Ø9/0.354 in. Aluminium tube mounting and fixing plate: 4 x Ø6/0.236 in. Aluminium tube mounting and foldable bracket: 4 x Ø6/0.236 in.
<b>Type references</b>	<b>XVGU</b>	<b>XVG</b>

**Monolithic tower lights**



<b>Type of products</b>	Pre-assembled and pre-cabled tower lights	Pre-assembled and pre-cabled tower lights	Pre-assembled and pre-cabled tower lights
<b>Diameter</b>	Ø 40 mm/1.575 in.	Ø 60 mm/2.36 in.	Ø 100 mm/3.937 in.
<b>Degree of protection conforming to IEC 60529</b>	IP 54 (flat surface installation) IP 23 (vertical surface installation)	IP 54 (flat surface installation) IP 23 (vertical surface installation)	IP 54 (flat surface installation)
<b>Type of signalling</b>	Yes Yes – With buzzer	Yes Yes – With buzzer	Yes Yes – With siren or buzzer
<b>Light sources</b>	– – Yes – –	– – Yes – –	– – Yes – –
<b>Colors of illuminated units</b>	<input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Green <input type="checkbox"/> Blue <input type="checkbox"/> Clear	<input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Green <input type="checkbox"/> Blue <input type="checkbox"/> Clear	<input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Green <input type="checkbox"/> Blue <input type="checkbox"/> Clear
<b>Connection</b>	Flying leads, length 450 mm/17.71 in. to 900 mm/35.43 in. according to model	Flying leads, length 450 mm/17.71 in. to 850 mm/33.46 in. according to model	Flying leads, length 500 mm/19.68 in.
<b>Support panel drilling or cut-out</b>	Mounting on support tube with bracket: 2 x Ø 9 mm/0.354 in. Direct mounting on horizontal support: 3 x Ø 5 mm/0.20 in. Other mounting possibilities with accessories	Mounting on support tube with bracket: 2 x Ø 11 mm/0.43 in. Direct mounting on horizontal support: 3 x Ø 5 mm/0.197 in. Other mounting possibilities with accessories	Direct mounting on horizontal support: - 3 x Ø 6 mm/0.236 in. (without siren) - 3 x Ø 7 mm/0.276 in. (with siren) Other mounting possibilities with accessories
<b>Type references</b>	<b>XVC4</b>	<b>XVC6</b>	<b>XVC1</b>

Harmony type XV **Modular tower lights**



<b>Type of products</b>	Illuminated beacons Variable composition tower lights for customer assembly of up to 5 units	Tower lights for customer assembly of up to 5 units.
<b>Diameter</b>	Ø 70 mm/2.756 in.	Ø 60 mm/2.362 in.
<b>Degree of protection conforming to IEC 60529</b>	IP 65 (mounted on fixing base XVBZ0●) IP 66 (mounted on base unit)	IP 65 for illuminated units IP 54 for audible units IP 55 for flexible mounting unit
<b>Type of signalling</b>	Steady Flashing "Flash" Sound	Yes Yes Yes Yes (buzzer or editable voice)
<b>Light sources</b>	Incandescent bulb LED bulb Integral LED "Flash" discharge tube Halogen bulb	Yes "PROTECTED LED" "PROTECTED LED" Yes -
<b>Colors of illuminated units</b>	<input type="checkbox"/> Green <input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Blue <input type="checkbox"/> Clear <input type="checkbox"/> Yellow	<input type="checkbox"/> Green <input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Blue <input type="checkbox"/> White <input type="checkbox"/> Yellow
<b>Connection</b>	Screw clamp terminals	Spring cage connection terminals
<b>Support panel drilling or cut-out</b>	Mounting on support tube: 4 x Ø 5.5 mm/0.217 in. or M5 Vertical mounting: 3 x Ø 5 mm/0.197 in. or M5 Direct mounting: 2 x Ø 4.5 mm/0.177 in. or M4	Mounting on support tube and adjustable support tube: 4 x Ø 6 mm/0.236 in. Flexible wall mounting: 3 x Ø 5 mm/0.197 in. Direct mounting: 2 x Ø 5 mm/0.197 in. 3 x Ø 5 mm/0.197 in. 4 x Ø 5 mm/0.197 in. Mounting on bracket: 2 x Ø 9 mm/0.354 in.
<b>Type references</b>	XVBL, XVBC	XVU

**Modular tower lights** **Rotating beacons** **Beacons** **Sound solutions**



<b>Type of products</b>	Pre-assembled/pre-cabled tower lights Variable composition tower lights for customer assembly of up to 5 units	Pre-cabled rotating beacons Pre-cabled motor-less rotating/flashing beacons	Complete miniature beacons	Sirens and electronic alarms
<b>Diameter</b>	Ø 45 mm/1.772 in.	Ø 84 mm/3.31 in. to Ø 130 mm/5.12 in.	Ø 45 mm/1.772 in.	-
<b>Degree of protection conforming to IEC 60529</b>	IP 54 in vertical position (XVM with plastic fixing plate) IP 42 in horizontal position (XVM with metal bracket) IP 40 in other positions (all types of XVM tower lights)	Ø 84 mm/3.31 in. and Ø 106 mm/4.17 in.: IP 23 (IP 65 with accessory) Ø 120 mm/4.72 in.: IP 23 Ø 130 mm/5.12 in.: IP 66 and IP 67 (depending on voltage) Ø 100 mm/3.94 in.: IP 65 for upright position, IP 23 for sideways and inverted position	IP 40	IP 53 (sirens) IP 54 (electronic alarms) IP 65 (editable voice)
<b>Type of signalling</b>	Yes Yes Yes Yes	Yes - - Yes	Yes - Yes -	- - - Yes (editable voice)
<b>Light sources</b>	Yes Yes - - Yes	- "Super Bright" - - Yes	Yes - - Yes	- - - -
<b>Colors of illuminated units</b>	<input type="checkbox"/> Red <input type="checkbox"/> Green <input type="checkbox"/> Orange <input type="checkbox"/> Blue <input type="checkbox"/> Clear	<input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Green <input type="checkbox"/> Blue	<input type="checkbox"/> Green <input type="checkbox"/> Red <input type="checkbox"/> Orange <input type="checkbox"/> Blue <input type="checkbox"/> Clear <input type="checkbox"/> Yellow	-
<b>Connection</b>	Flying leads, length 300 mm/11.81 in. or screw terminals	Flying leads, length 400 mm/15.75 in. (except XVR08: 500 mm/19.68 in.)	Screw clamp terminals	Screw clamp terminals (except XVS14: flying leads, length 500 mm/19.68 in.)
<b>Support panel drilling or cut-out</b>	Mounting on bracket: 2 x Ø 9 mm /0.354 in. Mounting on support tube: 4 x Ø 5.5 mm/0.217 in. or M5	Depending on model: - XVR08 (Ø 84 mm/3.31 in.): 3 x Ø 5 mm/0.197 in. - XVR10 (Ø 106 mm/4.17 in.): 3 x Ø 5 mm/0.197 in. - XVR12 (Ø 120 mm/4.72 in.): 3 x Ø 6 mm/0.236 in. - XVR13 (Ø 130 mm/5.12 in.): 3 x Ø 9 mm/0.354 in. - XVR13●●●L (Ø 130 mm/5.12 in.): 3 x Ø 7 mm/0.276 in. - XVR3 (Ø 100 mm/3.94 in.): 3 x Ø 6 mm/0.236 in.	3 x Ø 3.3 mm/0.130 in. or M3	3 x Ø 6.5 mm/0.256 in.
<b>Type references</b>	XVM	XVR	XVDLS	XVS

# Signaling units

## Rotating beacons

### Harmony XVR

Ø 84, Ø 106, Ø 120, and Ø 130

(equipped with Super Bright LED)



Rotating beacons

#### Presentation

The rotating beacons in the Harmony XVR range are optical signaling units designed for long distance signaling applications. They are used mainly in the iron and steel industry, on industrial handling vehicles or for safety applications.

#### Ø 84 (XVR08), Ø 106 (XVR10), Ø 120 (XVR12), Ø 130 (XVR13) rotating beacons

The range involves complete products offering simplicity of use and speed of installation: they are supplied pre-cabled, and equipped with their light source. The use of "Super-bright" LEDs provides good illuminating power and a long service life (reduced time for maintenance) owing to their high resistance to mechanical shock and vibration. These light sources are also energy saving with low power consumption. A reflecting prism can be used for increasing light diffusion.

4 sizes are available:

- Ø 84 mm/3.31 in. (XVR08), colors: red, orange, green, and blue
- Ø 106 mm/4.17 in. (XVR10), colors: red, orange, green, and blue
- Ø 120 mm/4.72 in. (XVR12), colors: red, orange, green, and blue
- Ø 130 mm/5.12 in. (XVR13), colors: red and orange

For greater efficiency, Ø 120 mm/4.72 in. rotating beacons can be delivered with a complementary audible unit: a buzzer at the base of the product, with a continuous or intermittent tone and an adjustable sound level of 50 dB to 90 dB at 1 m/3.28 ft.

#### Environment

XVR rotating beacons can offer a high degree of protection:

- The addition of the rubber base accessory provides IP 55 protection (or IP 65 for small models).
- Depending on the model, Ø 130 mm/5.12 in. rotating beacons provide IP 66 (vibration resistance) or IP 67 protection.

These products meet the requirements of the following standards:

- EN/IEC 61000-6-2 and EN/IEC 61000-6-4 for Ø 84 mm/3.31 in. (XVR08), 106 mm/4.17 in. (XVR10), 120 mm/4.72 in. (XVR12), and 130 mm/5.12 in. rotating beacons for DC (**XVR13B●●** and **XVR13J●●**)
- EN/IEC 60947-1 and EN/IEC 60947-5-1 for the other Ø 130 mm/5.12 in. rotating beacons (**XVR13●●L**) for 24 VAC/DC, 120 VAC, or 230 VAC

These products are CE, UL, and CSA certified.

#### Connection

Connection is via flying leads, length 400 mm/15.7 in. (500 mm/19.7 in. for XVR08) and cross-section 0.83 mm<sup>2</sup>/18 AWG (1.25 mm<sup>2</sup>/16 AWG for XVR13).



# Signaling units

## Rotating beacons

### Harmony XVR

Ø 100

(multi-functional LED beacon)



Ø 100 motor-less rotating beacon

#### Presentation

##### Ø 100 (XVR3) motor-less rotating/flashing beacons

The Ø 100 mm/3.94 in. range of motor-less rotating/flashing beacons in the Harmony XVR range are visual and audible signaling units mainly used for factory applications, construction vehicles, and in public areas. Available in 4 different colors (red, orange, green, and blue) they come with a faceted lens, which extends the lighting area while giving a unique look. This unique aesthetic design, which distinguishes them from other beacons, has been recognized by the Red Dot industrial design award for 2014 (1). Installation is made easy with a flexible voltage input, a light mode selector, and an integrated rubber base allowing straight and side wiring.

#### Signaling type

- Audible signaling: Adjustable 90 dB buzzer at 1m/3.28 ft (external buzzer volume adjustable from 70 dB to 90 dB)
- Visual signaling: Rotating, blinking, and flashing LEDs (10 lighting modes, adjusted by mode switch)

#### Lighting modes

Rotating	Mode 0	Rotating 100 min <sup>-1</sup>
	Mode 1	Rotating 140 min <sup>-1</sup>
	Mode 2	Rotating 200 min <sup>-1</sup>
Blinking	Mode 3	Blinking 60 min <sup>-1</sup>
	Mode 4	Blinking 130 min <sup>-1</sup>
Flashing	Mode 5	Flashing 3 times consecutively
	Mode 6	Flashing 5 times consecutively
	Mode 7	Flashing 8 times consecutively
	Mode 8	Flashing 11 times consecutively
	Mode 9	Flashing continuously

#### Environment

The XVR3 range has the following characteristics:

- Degree of protection
  - Up to IP 65 (without buzzer, upright installation)
- Vibration resistance
  - Up to 7.1G (upright installation)
- Product certifications and standards
  - These products are RoHS, CE and CCC compliant

#### Connection

Connection is via flying leads, length 400 mm/15.75 in. and cross-section 0.57 mm<sup>2</sup>/20 AWG (2).

(1) For more information on the red dot award, visit:

<http://www.red-dot-21.com/products/xvr3-beacon-22577>

(2) Without buzzer: VCT-F power cable (Ø 6.6 mm/0.260 in.) 0.652 mm<sup>2</sup> x 2/19 AWG x 2

With buzzer: VCT-F signal and power cable (Ø 8.2 mm/0.323 in.) 0.652 mm<sup>2</sup> x 5/19 AWG x 5

# Signaling units

## Rotating beacons

### Harmony XVR

Ø 84, Ø 106, Ø 120, and Ø 130

(equipped with Super Bright LED)



XVR08J06



XVR10J05



XVR12J04



XVR13J05



XVR13B05L



#### Complete, pre-cabled rotating beacons

Diameter Ø mm/in.	Sound option	IP degree of protection	Voltage V	Color	Reference	Weight kg/lb	
84/3.31	Without buzzer	IP 23 (IP 65 with accessories)	~ 12	Red	XVR08J04	0.300/0.661	
				Orange	XVR08J05	0.300/0.661	
				Green	XVR08J03	0.300/0.661	
			~ 24	Blue	XVR08J06	0.300/0.661	
				Red	XVR08B04	0.300/0.661	
				Orange	XVR08B05	0.300/0.661	
	106/4.17	Without buzzer	IP 23 (IP 55 with accessories)	~ 12	Red	XVR10J04	0.500/1.102
					Orange	XVR10J05	0.500/1.102
					Green	XVR10J03	0.500/1.102
				~ 24	Blue	XVR10J06	0.500/1.102
					Red	XVR10B04	0.500/1.102
					Orange	XVR10B05	0.500/1.102
120/4.72		Without buzzer	IP 23	~ 12	Red	XVR12J04	0.500/1.102
					Orange	XVR12J05	0.500/1.102
					Green	XVR12J03	0.500/1.102
				~ 24	Blue	XVR12J06	0.500/1.102
					Red	XVR12B04	0.500/1.102
					Orange	XVR12B05	0.500/1.102
	With buzzer, continuous or intermittent tone. Sound level at 1 m/3.28 ft: 50 to 90 dB	IP 23	~ 12	Green	XVR12B03	0.500/1.102	
				Blue	XVR12B06	0.500/1.102	
				Red	XVR12J04S	0.500/1.102	
			~ 24	Orange	XVR12J05S	0.500/1.102	
				Green	XVR12J03S	0.500/1.102	
				Blue	XVR12J06S	0.500/1.102	
130/5.12	Without buzzer	IP 66 vibration resistance	~ 12	Red	XVR12J04S	0.500/1.102	
				Orange	XVR12J05S	0.500/1.102	
				Green	XVR12J03S	0.500/1.102	
			~ 24	Blue	XVR12J06S	0.500/1.102	
				Red	XVR12B04S	0.500/1.102	
				Orange	XVR12B05S	0.500/1.102	
	IP 66 and IP 67	~ 12	Green	XVR12B03S	0.500/1.102		
			Blue	XVR12B06S	0.500/1.102		
			Red	XVR13J04	0.800/1.764		
		~ 24	Orange	XVR13J05	0.800/1.764		
			Red	XVR13B04	0.800/1.764		
			Orange	XVR13B05	0.800/1.764		
~ 120	~ 24	Red	XVR13B04L	0.820/1808			
		Orange	XVR13B05L	0.820/1808			
		Red	XVR13G04L	0.990/2183			
	~ 230	Orange	XVR13G05L	0.990/2183			
		Red	XVR13M04L	0.990/2183			
		Orange	XVR13M05L	0.990/2183			

#### Accessories for rotating beacons

Description	To be used for/with	Diameter mm/in.	Height mm/in.	Reference	Weight kg/lb
Reflecting prism	Increasing light diffusion	84/3.31	–	XVRZR1	0.010/0.022
		106/4.17	–	XVRZR2	0.015/0.033
		120/4.72, 130/5.12	–	XVRZR3	0.020/0.044
Rubber base	IP 65 protection	84/3.31	–	XVRZ081	0.040/0.088
		IP 55 protection	106/4.17	–	XVRZ082
Metal angle bracket	Horizontal support	84/3.31, 100/3.94, 106/4.17, 120/4.72	–	XVCZ23	0.380/0.084
		130/5.12	–	XVR012L	1.300/2.866
Metal fixing plate	Horizontal support	106/4.17, 120/4.72	300/ 11.8	XVCZ13	0.700/1.543

# Signaling units

Rotating beacons

Harmony XVR

Ø 100

(multi-functional LED beacon)

PF141507A



XVR3B03

PF141508A



XVR3B04S

PF141506A



XVR3E06

PF141509A



XVR3Z001

### Complete, pre-cabled motor-less rotating/flashing beacons

Diameter Ø mm/in.	Sound option	IP degree of protection	Voltage V	Color	Reference	Weight kg/lb				
100/3.94	Without buzzer	IP 65 (upright) IP 23 (sideways, inverted)	☰ 12-24	Green	<b>XVR3B03</b>	0.484/1.067				
				Red	<b>XVR3B04</b>	0.484/1.067				
				Orange	<b>XVR3B05</b>	0.484/1.067				
				Blue	<b>XVR3B06</b>	0.484/1.067				
	~ 100-230				Green	<b>XVR3M03</b>	0.484/1.067			
					Red	<b>XVR3M04</b>	0.484/1.067			
					Orange	<b>XVR3M05</b>	0.484/1.067			
					Blue	<b>XVR3M06</b>	0.484/1.067			
	100/3.94	With buzzer	IP 23 (upright, sideways, inverted)	☰ 12-24	Green	<b>XVR3B03S</b>	0.538/1.186			
					Red	<b>XVR3B04S</b>	0.538/1.186			
					Orange	<b>XVR3B05S</b>	0.538/1.186			
					Blue	<b>XVR3B06S</b>	0.538/1.186			
~ 100-230								Green	<b>XVR3M03S</b>	0.538/1.186
								Red	<b>XVR3M04S</b>	0.538/1.186
								Orange	<b>XVR3M05S</b>	0.538/1.186
								Blue	<b>XVR3M06S</b>	0.538/1.186
100/3.94	Without buzzer	IP 65 (upright) IP 23 (sideways, inverted)	☰ 48	Red	<b>XVR3E03</b>	0.484/1.067				
				Orange	<b>XVR3E04</b>	0.484/1.067				
				Green	<b>XVR3E05</b>	0.484/1.067				
				Blue	<b>XVR3E06</b>	0.484/1.067				

### Accessories for motor-less rotating beacons

Description	To be used for/with	Reference	Weight kg/lb
External lens	Multi-functional LED beacon	<b>XVR3Z001</b>	0.083/0.183

<b>X</b>		
XVCZ13	8	XVR13G05L 8
XVCZ23	8	XVR13J04 8
XVR3B03	9	XVR13J05 8
XVR3B03S	9	XVR13M04L 8
XVR3B04	9	XVR13M05L 8
XVR3B04S	9	XVRZ081 8
XVR3B05	9	XVRZ082 8
XVR3B05S	9	XVRZR1 8
XVR3B06	9	XVRZR2 8
XVR3B06S	9	XVRZR3 8
XVR3E03	9	
XVR3E04	9	
XVR3E05	9	
XVR3E06	9	
XVR3M03	9	
XVR3M03S	9	
XVR3M04	9	
XVR3M04S	9	
XVR3M05	9	
XVR3M05S	9	
XVR3M06	9	
XVR3M06S	9	
XVR3Z001	9	
XVR08B03	8	
XVR08B04	8	
XVR08B05	8	
XVR08B06	8	
XVR08J03	8	
XVR08J04	8	
XVR08J05	8	
XVR08J06	8	
XVR10B03	8	
XVR10B04	8	
XVR10B05	8	
XVR10B06	8	
XVR10J03	8	
XVR10J04	8	
XVR10J05	8	
XVR10J06	8	
XVR12B03	8	
XVR12B03S	8	
XVR12B04	8	
XVR12B04S	8	
XVR12B05	8	
XVR12B05S	8	
XVR12B06	8	
XVR12B06S	8	
XVR12J03	8	
XVR12J03S	8	
XVR12J04	8	
XVR12J04S	8	
XVR12J05	8	
XVR12J05S	8	
XVR12J06	8	
XVR12J06S	8	
XVR012L	8	
XVR13B04	8	
XVR13B04L	8	
XVR13B05	8	
XVR13B05L	8	
XVR13G04L	8	



[www.schneider-electric.com](http://www.schneider-electric.com)

#### Schneider Electric Industries SAS

Head Office  
35, rue Joseph Monier  
F-92500 Rueil-Malmaison  
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric