

# STREETOS 2

SLI027019NW\_PW


Street luminaire STREETOS 2, with a power of 200 W, high light efficacy 140 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK9 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K).



Power	<b>200 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>28000 lm (360°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>145/75 °</b>
IK	<b>9</b>	Degree of protection (IP)	<b>IP65</b>


## Technical data

Code	SLI027019NW_PW
Power	200 W
Nominal current	880 mA
Voltage	230 V
Energy consumption	200 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power factor	0.9
Useful luminous flux*	28000 lm (360°)
Luminous flux**	27000 lm (360°)
Lamp efficacy	140 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	145/75 °
RA	70
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum, PC
IK	9
Degree of protection (IP)	IP65
Colour	Gray
Dimension (AxBxC)	755x253x124 mm
Mounting hole	60 mm
For use	Outside
Assembly method	On a pole
Application	EXT
Made in	PRC
Other	100-277V ,

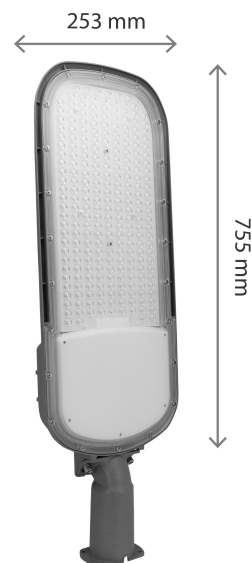


## Related documents



 User manual



 Declaration of Conformity



 Photometric file

