


# Opti-Linear



- LED low bay suitable for industrial and commercial applications
- Ideal for any retro-fit applications replacing any traditional light sources
- Fast install/wiring via access hatch on the back of the product with push fit terminals
- Instant light output and unlimited switching
- Supplied c/w 1.5 metre catenary suspension kit
- Mild Steel powder coat construction
- 1-10V dimmable as standard

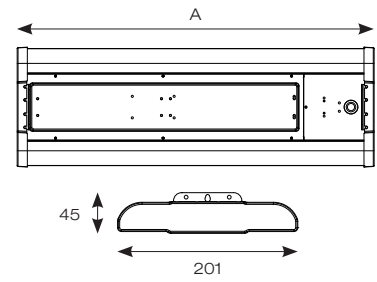

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-30°C to 45°C	L80 B10 54,000	Ra 80	5	50/100°	1	IP20	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
AOLLBLED/1	Cool White	77W	4000K	11090lm	144lm	597mm	£186.00
AOLLBLED/2	Cool White	156W	4000K	20960lm	134lm	1197mm	£318.00
AOLLBLED/3	Cool White	202W	4000K	26390lm	131lm	1197mm	£345.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £130.00	/MWS	Integral Microwave Sensor	+ £83.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AZLED/MWSP	High Bay Microwave Sensor Programmer	£55.50

\* AZLED/MWSP required to programme on site. This product is no longer supplied with an inbuilt dipswitch.