



Corepro - LED HID HPL



TForce Core LED HPL 36W E27 840 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short pay-back to replace High Intensity Discharge (HID) lamps. This new generation of LED Core Post-Top lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

Product data

General Information		Luminous Efficacy (rated) (Nom)	
Cap-Base	E27		166 lm/W
Nominal lifetime	25,000 hour(s)	Color Consistency	<6
Switching Cycle	50,000	Color rendering index (CRI)	80
Lighting Technology	LED	LLMF At End Of Nominal Lifetime (Nom)	70 %
Flux measurement reference	Sphere	Photobiological safety according to EN 62471	RG0
Light Technical		Operating and Electrical	
Color Code	840 [CCT of 4000K]	Line Frequency	50 to 60 Hz
Beam Angle (Nom)	300 degree(s)	Input Frequency	50 to 60 Hz
Luminous Flux	6,000 lm	Power Consumption	36 W
Color Designation	Cool White (CW)	Lamp Current (Nom)	143 mA
Correlated Color Temperature (Nom)	4000 K	Starting Time (Nom)	0.5 s
		Warm-up time to 60% light	0.5 s

Corepro - LED HID HPL

Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Ballast Compatibility	Mains only
Inrush current at mains	32
Max. lamp no. on MCB B type 10A - Mains	6
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	10
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - EM ballast with Compensation Capacitor.	-

Temperature

T-Case Maximum (Nom)	43.3 °C
----------------------	---------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Shape	ED90
Net Weight (Piece)	0.204 kg

Approval and Application

Energy Efficiency Class	C
-------------------------	---

Energy Consumption kWh/1000 h	36 kWh
EPREL Registration Number	403655
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	1.6
Ambient temperature range	-30 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data

Order product name	TForce Core LED HPL 36W E27 840 FR	
Full product name	TForce Core LED HPL 36W E27 840 FR	
Full product code	871951429929000	
Order code	929002481302	
Material Nr. (12NC)	929002481302	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8719514299290	
Numerator - Packs per outer box	6	
EAN/UPC - Case	8719514299306	



Dimensional drawing



Product	D	C
TForce Core LED HPL 36W E27 840 FR	91.5 mm	249 mm



Corepro - LED HID HPL

Photometric data




Light Distribution Diagram - TForce Core LED HPL 36W E27 840 FR

General uniform lighting - TForce Core LED HPL 36W E27 840 FR

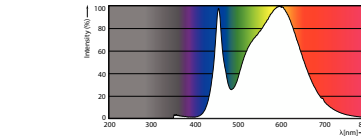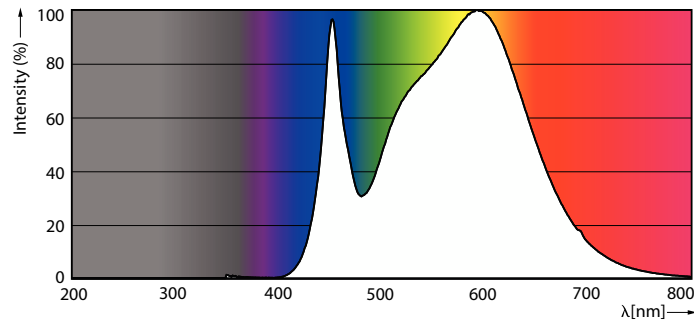

Spectral Power Distribution Colour - TForce Core LED HPL 36W E27 840 FR



Spectral Power Distribution Colour - TForce Core LED HPL 36W E27 840 FR



Light Distribution Diagram - TForce Core LED HPL 36W E27 840 FR

Corepro - LED HID HPL

Lifetime

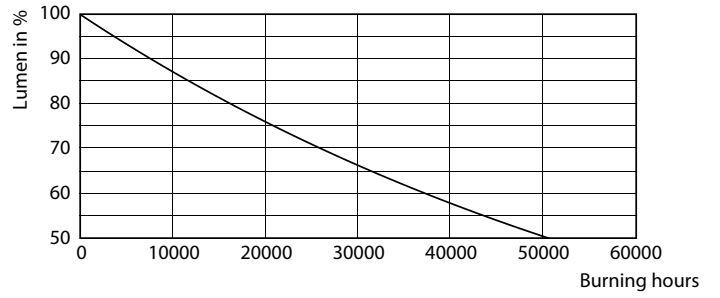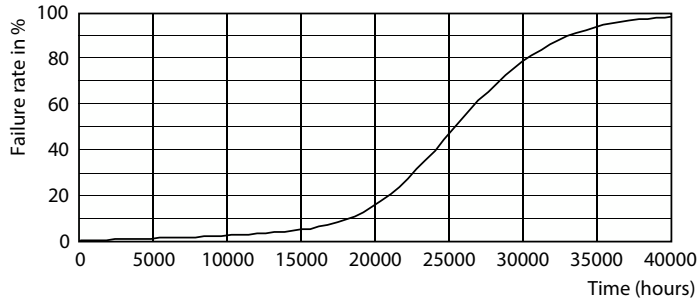

Life Expectancy Diagram

Lumen Maintenance Diagram - TForce Core LED HPL 36W E27 840 FR

