

# PRODUCT DATASHEET SF BLKH EYELID 250 BK

SURFACE BULKHEAD EYELID | Attachable half-visor ring (IK10)



# **Product features**


- Eyelid ring for Surface Bulkhead
- Available for 250 mm and 300 mm Bulkhead version
- Available in black and white color
- Impact resistance: IK10



#### **TECHNICAL DATA**

# **Dimensions & Weight**

Diameter	258 mm
Height	64.0 mm
Product weight	210.00 g

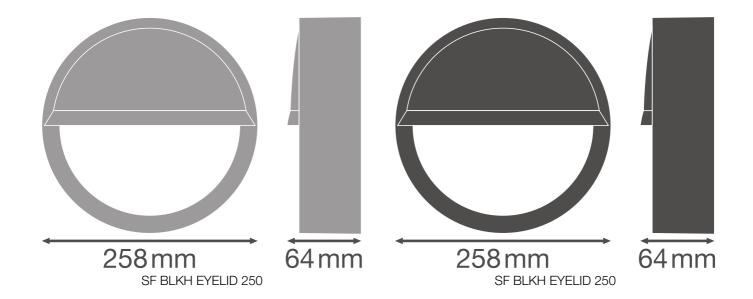

#### Materials & Colors

Product color	Black
Cover material	Polycarbonate (PC)

## **Application & Mounting**

Moun	ing location	Luminaire

#### Certificates & Standards

Luminaire with limited surface temperature, "D sign"

No

### EQUIPMENT / ACCESSORIES

- Anti-theft screw included

# DOWNLOAD DATA

	Documents and certificates	Document name	
POF	User instruction / safety instructions	SURFACE BULKHEAD	
	Photometric and lighting design files	Document name	
	IES file (IES)	IES SF BLKH EYELID 250 BK 4000K	
	IES file (IES)	IES SF BLKH EYELID 250 BK 3000K	
	Tender texts	Document name	
	Tender documents	SURFACE BULKHEAD EYELID 250 BK-EN	

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075375505	Folding box 1	74 mm x 272 mm x 262 mm	292.00 g	5.27 dm <sup>3</sup>
4058075375512	Shipping box 8	550 mm x 285 mm x 315 mm	2918.00 g	49.38 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## **References / Links**

- For Guarantee see www.ledvance.com/guarantee

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.