


BVT TC 1 (918 411)


- Pins of RJ sockets compatible with RJ12
- Additional screw terminals for a/b lines
- For installation in conformity with the lightning protection zone concept at the boundaries from $O_b - 2$ and higher



Figure without obligation

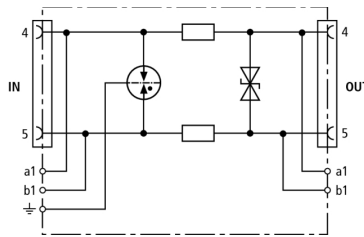

Basic circuit diagram BVT TC



Dimension drawing BVT TC

Energy-coordinated and leakage-current-free surge arrester for a/b lines, ISDN U_{k0} or ADSL with RJ45 plugs and additional screw terminals. Pinning of the RJ45 sockets is compatible with RJ11/12. The parallel screw terminals are more robust than the RJ45 sockets and increase the total nominal discharge current to 10 kA.

Type	BVT TC 1
Part No.	918 411
SPD class	TYPE 2/P2
Nominal voltage (U_n)	130 V
Max. continuous operating voltage (d.c.) (U_c)	170 V
Nominal current (I_n)	0.2 A
D1 Lightning impulse current (10/350 μ s) per line (I_{imp})	1 kA
C2 Nominal discharge current (8/20 μ s) per line (I_n)	2.5 kA
C2 Total nominal discharge current (8/20 μ s) (I_n)	5 kA
Voltage protection line-line for I_n C2 (U_p)	≤ 275 V
Voltage protection level line-PG for I_n C2 (U_p)	≤ 600 V
Voltage protection level line-line at 1 kV/ μ s C3 (U_p)	≤ 240 V
Voltage protection level line-PG at 1 kV/ μ s C3 (U_p)	≤ 600 V
Series resistance per line	4.7 ohms
Cut-off frequency line-line (f_c)	17 MHz
Capacitance line-line (C)	≤ 300 pF
Capacitance line-PG (C)	≤ 15 pF
Operating temperature range (T_U)	-40 °C ... +80 °C
Degree of protection	IP 10
For mounting on	35 mm DIN rails acc. to EN 60715
Connection (input / output)	RJ45 or terminals / RJ45 or terminals
Pinning	4/5
Cross-sectional area, solid	0.08 - 2.5 mm ²
Cross-sectional area, flexible	0.08 - 2.5 mm ²
Earthing via	screw terminal
Enclosure material	thermoplastic, UL 94 V-0
Colour	yellow
Test standards	IEC 61643-21 / EN 61643-21
Weight	99 g
Customs tariff number	85363010
GTIN	4013364093133
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.