


	27-50 V TBTS
	4 x (\varnothing 0,6 < $\frac{\text{---}}{\text{---}}$ < \varnothing 0,8) 8 mm
X =	x = 12
	-5°C → +45°C
	NF EN50428 IEC 60669-2-1



D	Ø
≤ 100 m	0,5 mm ²
≤ 150 m	0,75 mm ²
≤ 300 m	1,5 mm ²

		A		B		C		D		E		F							
		L1		L1		L1		L1		L1		L1							
		L1		L1		L1		L1		L1		L1							
A - B	230 V~ 110 V~ 12 - 48 V~/V=	80 VA 40 VA 80 VA	0,3 A	250 VA 125 VA	1,1 A	250 VA 125 VA	1,1 A	2 (2 x 36) W 1 (2 x 36) W	0,8 A	80 VA 40 VA	0,3 A	80 VA 40 VA	0,3 A	500 W 250 W	2,1 A	250 VA 125 VA	1,1 A	250 VA 125 VA	1,1 A
C - D	230 V~ 110 V~	160 VA 80 VA	0,7 A	500 VA 250 VA	2,1 A	500 VA 250 VA	2,1 A	4 (2 x 36) W 2 (2 x 36) W	1,7 A	160 VA 80 VA	0,7 A	160 VA 80 VA	0,7 A	1000 W 500 W	4,3 A	500 VA 250 VA	2,1 A	500 VA 250 VA	2,1 A
E - F	230 V~ 110 V~	500 VA 250 VA	2,1 A	1000 VA 500 VA	4,3 A	1000 VA 500 VA	4,3 A	10 (2 x 36) W 5 (2 x 36) W	4,3 A	500 VA 250 VA	2,1 A	500 VA 250 VA	2,1 A	3680 W 1760 W	16 A	500 VA 250 VA	2,1 A	500 VA 250 VA	2,1 A
		DALI																	
		230 V~ 110 V~						64 ballasts Maxi											

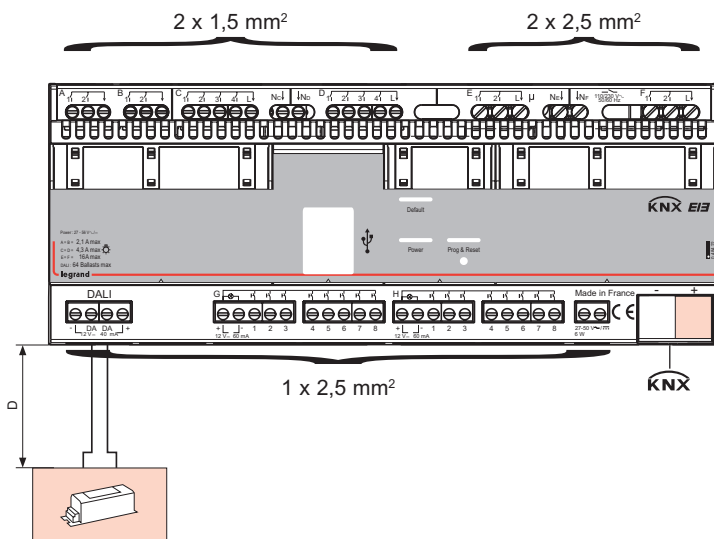