



Classia
Shutter switch


RW4037 - RA4037 - RG4037
RW4027 - RA4027 - RG4027
RW4028H - RA4028H - RG4028H



..4037



..4027



..4028H

Use

Shutter control device for lighting and other loads.


Range

Designation	Item
Shutter switches double 1P (NO) + 1P (NO) - interlocked	<input type="checkbox"/> RW4037
	<input type="checkbox"/> RA4037
	<input type="checkbox"/> RG4037
Shutter switches Changeover switch 1P	<input type="checkbox"/> RW4027
	<input type="checkbox"/> RA4027
	<input type="checkbox"/> RG4027
Double-key changeover switch 1-0-2 with interlock and double signalling	<input type="checkbox"/> RW4028H
	<input type="checkbox"/> RA4028H
	<input type="checkbox"/> RG4028H

Color code:

White colour Aluminum colour Black colour

Overall dimensions (mm)

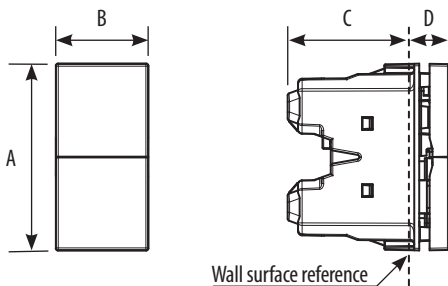

	A	B	C	D
..4037	45.1	22.3	29.3	9.8
..4027	45.1	22.3	33.8	9.8
..4028H	45.1	22.3	33.8	9.8

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 2,5 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Case: PC (Polycarbonate)
Key cover: ABS – ABS/PC

Halogen free.

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 250 V a.c.
Current: 10 A

- Climatic characteristics

Storage temperature: - 10° C to + 70° C
Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.
Refer to e.catalogue.