


# LIGHTSTREAM mini

721714.1131 | Spotlights



Spotlights  
4051859012023  
L 194, B 109, H 226

Universal mounting system  
anthracite metallic (DB703)

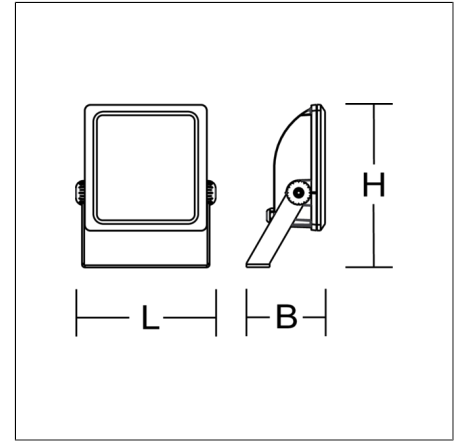

LED floodlight for accent and area lighting. Housing made of corrosion-resistant die-cast aluminium for outdoor use, powder-coated. Bracket: aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Reflector made of high purity aluminium, glossy brightened and anodised. COB LED with socket for easy replacement. Ceramic coated toughened glass. Rotationally symmetric wide beam light distribution. Piano-key terminal up to 5 x 2,5 mm<sup>2</sup>, max cable Ø 13 mm. Second cable gland for loop through available as accessory.


## Product specifications

Length L	194 mm
Width B	109 mm
Height H	226 mm
Weight	1.37 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2200 lm
System power	23 W
System efficiency	96 lm/W
Glare evaluation UGR (4H 8H)	29,3
Beam angle	106°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	85
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	63 99 100 100 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-25 °C ... + 50 °C
Safety marks	D-mark
Test marks	ENEC, VDE
Conformity mark	CE, EAC

## Accessories




982058.000  
Wall bracket, 500 mm, uncoated



982058.0031  
Wall bracket, 500 mm, anthracite metallic



982086.000  
Wall bracket, 1000 mm, uncoated



982086.0031  
Wall bracket, 1000 mm, anthracite metallic



982047.000  
Pole attachment (single): for spigot 60 mm, unpainted



982047.0031  
Pole attachment (single): for spigot 60 mm, anthracite metallic (DB703)



982047.004  
Pole attachment (single): for spigot 60 mm, silver, matt (approx. RAL 9006)



982048.000  
Pole attachment (single): for spigot 76 mm, unpainted



982048.0031  
Pole attachment (single): for spigot 76 mm, anthracite metallic (DB703)



982049.000  
Pole attachment (double): for spigot 60 mm, unpainted



982049.0031  
Pole attachment (double): for spigot 60 mm, anthracite metallic (DB703)



982050.000  
Pole attachment (double): for spigot 76 mm, unpainted




982050.0031  
Pole attachment (double): for spigot 76 mm, anthracite metallic (DB703)



982090.000  
Pole clip for pole diameter 95 - 113 mm



982091.000  
Pole clip for pole diameter 114 - 132 mm



982367.009  
Cable gland M16x1,5




982524.0031  
Adapter set for 4-fold configuration (4 x 90°)



981962.003  
Earth spike

## Spareparts



981933.0031  
Front frame with safety pane