

NOCTIS LUX 2

SLI029039NW



See
more

Floodlight NOCTIS LUX 2, with a power of 30 W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. It shines with light of neutral - the most universal colour (4000K). Designed for surface mounting.


IP65



Power	30 W	Voltage	230 V
Luminous flux*	2750 lm (120°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	100 °
Degree of protection (IP)	IP65		


Technical data

Code	SLI029039NW
Power	30 W
Nominal current	130 mA
Voltage	230 V
Energy consumption	30 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0.9
Useful luminous flux*	2750 lm (120°)
Luminous flux**	2650/2750 lm (360°)
Lamp efficacy	88 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	100 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, GLASS
Degree of protection (IP)	IP65
Colour	Black
Dimension (AxBxC)	120x160x28 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC

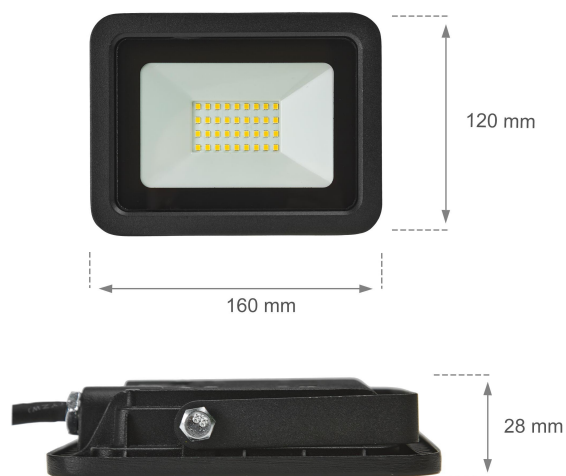

Related documents



 Declaration of Conformity



 Photometric file

