


Unity S and R Downlights



- Square and Rectangular recessed adjustable architectural downlight suitable for commercial, hospitality and retail applications
- Fully adjustable tilt angle 30° on two axis
- Black trim provides excellent glare control
- Steel housing with die-cast aluminium body for good thermal management
- Remote driver with plug and play connection
- Dimmable options
- Powered by Tridonic

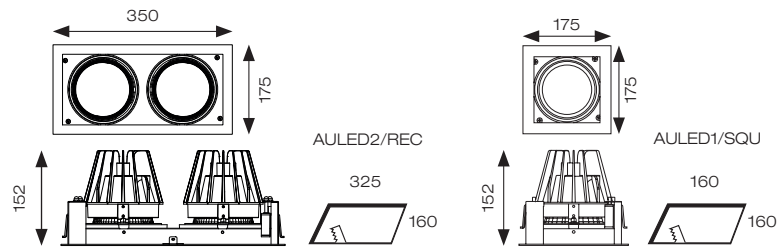

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 25°C	L80 60,000	Ra 90	3	40°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	TRADE
AULED1/SQU	Cool White - Square	37W	4000K	3140lm	88lm	<10	£108.00
AULED2/REC	Cool White - Rectangular	2 x 37W	4000K	2 x 3140lm	88lm	13.2	£227.00

*UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/OCTO	OCTO Smart Control	+ £155.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00

