

# NOCTIS LUX 3

SLI029052NW\_CZUJNIK\_PW



See  
more

Floodlight NOCTIS LUX 3, with a power of 10 W. It has a high IP44 rating, making it ideal for use in areas of high humidity. IK07 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Designed for surface mounting.

IP44


IK07



Power	<b>10 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>975 lm (120°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>100 °</b>
IK	<b>07</b>	Degree of protection (IP)	<b>IP44</b>

## Technical data

Code	SLI029052NW_CZUJNIK_PW
Power	10 W
Nominal current	45 mA
Voltage	230 V
Energy consumption	10 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0.9
Useful luminous flux*	975 lm (120°)
Luminous flux**	975 lm (360°)
Lamp efficacy	98 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	100 °
RA	>70
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, GLASS
IK	07
Degree of protection (IP)	IP44
Colour	White
Dimension (AxBxC)	114x150x53 mm
For use	Outside
Assembly method	On the ceiling
Application	EXT
Made in	PRC

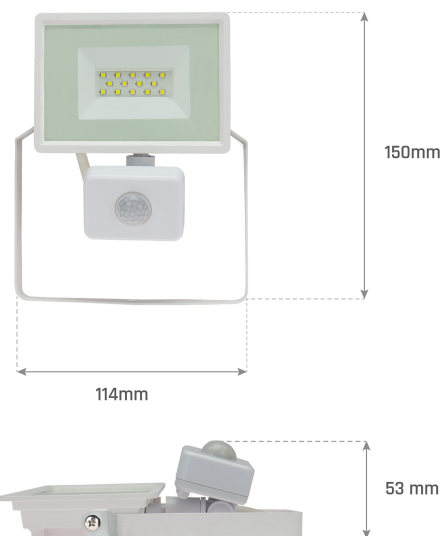

## Related documents



 Declaration of Conformity



 Photometric file

