

Product Data Sheet

GW94566


90 RCD Range




Description	RESIDUAL CURRENT DEVICE
Code	BD
No. of poles	2P
No. modules	2
Rated current	63 A
Rated residual operating current	30 mA
Type	A[IR]
Rated voltage (IEC/EN 61009-1 app. G, IEC/EN 61009-2-1 app. G)	230V

Standard	IEC/EN 61009-1 app. G, IEC/EN 61009-2-1 app. G	Rated frequency (Hz)	50/60 Hz
Insulation voltage	500 V	Rated impulse withstand voltage	4 kV
Overvoltage category	III	Level of immunity (8/20 μs)	3000 A
Section rigid cable	Max 35 mm ²	Section flexible cable	Max 35 mm ²
Operating temperature	-25 +40 °C	Stocking temperature	-40 +70 °C
Rated tightening torque	2 Nm	Assembly position	Any

DIMENSIONAL

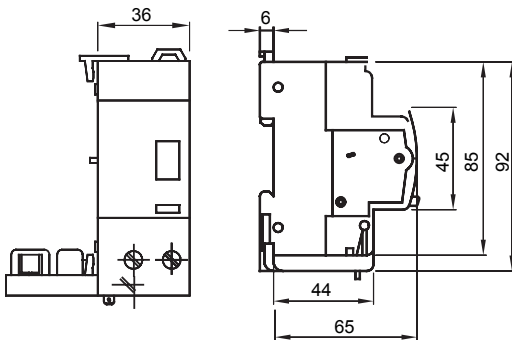

WIRING DIAGRAM

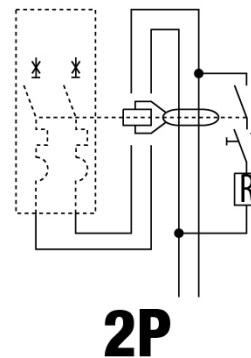

STANDARDS/APPROVALS

