

## PHILIPS

# MASTER LEDtube EM/ Mains T8

## MAS LEDtube 1200mm HO 12.5W 865 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

#### **Warnings and Safety**

• NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

#### **Product data**

General Information	
Cap-Base	G13 ROT (Rotating) [Medium Bi-Pin
	Fluorescent]
Nominal lifetime	75,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	160 degree(s)
Luminous Flux	2,100 lumen
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K

Luminous Efficacy (rated) (Nom)	168 lm/W	
Color Consistency	<6	
Color rendering index (CRI)	80	
LLMF At End Of Nominal Lifetime (Nom) 70 %		
Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	12.5 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.9	
Voltage (Nom)	220-240 V	


Datasheet, 2023, May 16 data subject to change

## **MASTER LEDtube EM/Mains T8**

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	50 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	1,200 mm
Bulb Shape	Tube, double-ended
Approval and Application	·
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur
	certificate


Energy Consumption kWh/1000 h	13 kWh
EPREL Registration Number	1,206,968
CE mark	Yes
EU RoHS compliant	Yes
Product Data	
Full product code	871869959239400
Order product name	MAS LEDtube 1200mm HO 12.5W 865 T8
Order code	929001922802
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929001922802
Full product name	MAS LEDtube 1200mm HO 12.5W 865 T8
EAN/UPC - Case	8718699592400

### Dimensional drawing






### Photometric data




Light Distribution Diagram - MAS LEDtube 1200mm HO 12.5W 865 T8

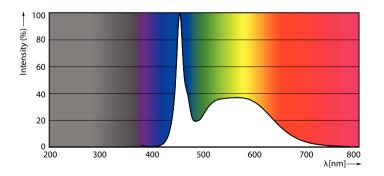

Spectral Power Distribution Colour - MAS LEDtube 1200mm HO 12.5W 865 T8


## **MASTER LEDtube EM/Mains T8**


#### Photometric data




Calculus Photometrics 4.5 Philips Lighting St.V. Fago: 177

#### Lifetime

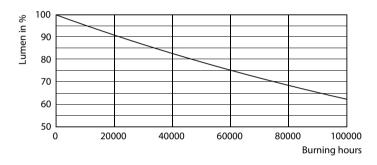




Lumen Maintenance Diagram - MAS LEDtube 1200mm HO 12.5W 865 T8

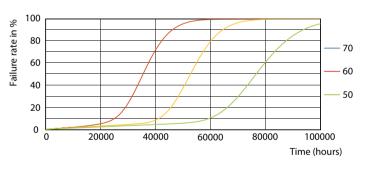

Lumen Maintenance Diagram - MAS LEDtube 1200mm HO 12.5W 865 T8

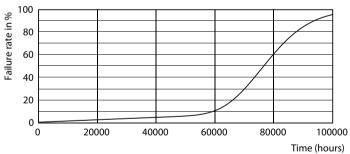


Life Expectancy Diagram - MAS LEDtube 1200mm HO 12.5W 865 T8

Life Expectancy Diagram - MAS LEDtube 1200mm HO 12.5W 865 T8

## **MASTER LEDtube EM/Mains T8**

#### Lifetime

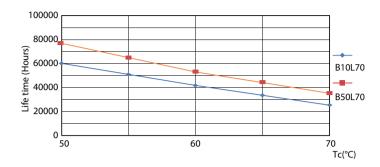

Life Expectancy Diagram - MAS LEDtube 1200mm HO 12.5W 865 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.