


# Halogen Standard 70 W 24 V P14.5s



## **Product family benefits**

- Powerful light output
- Suitable for the most common 24 V headlights
- Reliable manufacturer
- Affordable
- Reliable products

#### **Product family features**

- Vibration-resistant
- Designed specifically for 24 V
- ECE certified lamps
- Good and reliable quality thanks to German technology
- Durable

#### Areas of application

Headlight


# **Product datasheet**



Electrical data Power input Test voltage Nominal wattage Nominal voltage  Photometrical data Color temperature Luminous flux Luminous flux tolerance  Dimensions & weight Product weight Length Diameter	e	84 W 28.0 V 70.00 24.0 V 3200 I 1900 I ±15 %	W C	
Power input Test voltage Nominal wattage Nominal voltage  Photometrical data Color temperature Luminous flux Luminous flux tolerance  Dimensions & weight  Product weight Length	e	28.0 V 70.00 24.0 V 3200 I 1900 I ±15 %	W C	
Test voltage Nominal wattage Nominal voltage  Photometrical data Color temperature Luminous flux Luminous flux tolerance  Dimensions & weight Product weight Length	e	28.0 V 70.00 24.0 V 3200 I 1900 I ±15 %	W C	
Nominal wattage Nominal voltage  Photometrical data Color temperature Luminous flux Luminous flux tolerance  Dimensions & weight Product weight Length	e	70.00 24.0 V 3200 I 1900 I ±15 %	W C	
Photometrical data Color temperature Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length	e	24.0 V 3200 I 1900 I ±15 %	ζ m	
Photometrical data Color temperature Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length	e	3200 I 1900 I ±15 %	( .m	
Color temperature Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length	e	1900 l ±15 % 5.88 g	m	
Luminous flux Luminous flux tolerance  Dimensions & weight  Product weight  Length	e	1900 l ±15 % 5.88 g	m	
Luminous flux tolerance  Dimensions & weight  Product weight  Length	e	±15 %		
<b>Dimensions &amp; weight</b> Product weight Length	e	5.88 g		
Product weight Length				
Length				
		67.5 m		
Diameter			67.5 mm	
		9 mm		
Lifespan				
Lifespan Tc		650 h		
Lifespan B3		400 h		
Additional product data	1			
Base (standard designate	tion)	P14.5s	5	
Capabilities				
echnology		Halogen lamp		
Certificates & standard	<b>s</b>			
ECE category		H1		
British standard		466		
British Standard		100		
Logistical data		N1466		
Order reference		N466		
Environmental informat	tion			
Date of Declaration		02-12-2022		
Primary Article Identifier		40065 40083 40528 40528 50112	4006584359240   4006584051458   4008321760418   4052899198463   405289995697   5011274046606   5055175230108	
Candidate List Substance 1		No de	clarable inces contain	
Declaration No. in SCIP	database	In wor	k	
	on.			
Packaging description	EAN	Packaging type		
NEOLUX N466	4008321760418		article 1	

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N466	4008321760418	Folding box	1

## **Product datasheet**

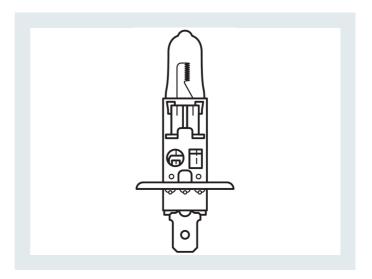



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com