

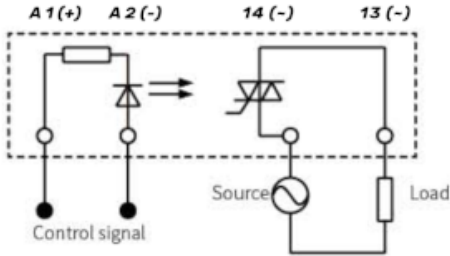


1 solid  
state relay 12-24Vdc/230Vac 2A spring, pluggable



<b>Series</b>	CWR
<b>Code</b>	X766832S
<b>Type</b>	
<b>HS code</b>	85364190
<b>INPUT TECHNICAL DATA</b>	
<b>Input rated voltage</b>	24 Vdc ±10%
<b>Pull in / drop out voltage type</b>	19.2 V / 9 V
<b>Current consumption</b>	25 mA ±10% at 24 Vdc
<b>Turn ON / OFF time</b>	8 ms / 5 ms
<b>Protection circuit</b>	Free-wheel diode, Reverse polarity
<b>Connection terminal</b>	2.5 mm <sup>2</sup> (spring)
<b>Input channels</b>	1 pluggable
<b>OUTPUT TECHNICAL DATA</b>	
<b>Contact type</b>	zero crossing triac
<b>Output voltage</b>	48...280 Vac
<b>Nominal current</b>	2 A (48...280 Vac)
<b>Connection type</b>	
<b>GENERAL TECHNICAL DATA</b>	
<b>Operating temperature range</b>	-20...+70°C
<b>Input / output isolation</b>	2.5 kVac / 60 s
<b>Protection degree</b>	IP 20
<b>Overvoltage category / pollution degree</b>	II / 2
<b>Status indication</b>	LED "Input"
<b>Housing material</b>	UL94V-0 plastic material
<b>Dimensions (LxHxD)</b>	6.2x89x77 mm
<b>Approximate weight</b>	35 g
<b>Continuous current</b>	80 A for 10 ms
<b>Mounting information</b>	on a rail, side by side
<b>Leakage current with signal 0</b>	1.5 mA
<b>Min applicable load</b>	0.1 A
<b>ACCESSORIES</b>	
<b>Mounting rail (IEC60715/TH35-7.5)</b>	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
<b>Marking tag</b>	NUPUTUK50
<b>Plug-in jumper</b>	CWBK7-0813 (20 poles)
<b>APPROVALS AND MARKINGS</b>	CE, 



\* Pluggable relay\* DC input voltage\* Suitable for AC Load\* Compact dimensions\* Available plug-in jumper for potential distribution\* with spring connection  
1 Manufacturer and model of the relay is not binding, technical data are to be considered typical

## DESCRIZIONE DEL PRODOTTO

CWS-024DC/230AC/02 1 solid state relay 12-24Vdc/230Vac 2A  
spring, pluggable