

# WLD+40042\_DALI

WLD+40042\_DALI

---



---

Power	<b>22 W</b>	Voltage	<b>48 V</b>
Colour temperature	<b>3000 K</b>	Colour of light	<b>WW</b>
Beam angle	<b>35 °</b>	Degree of protection (IP)	<b>IP20</b>

---


## Technical data

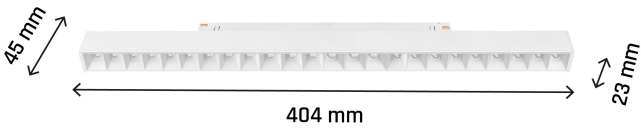

Code	WLD+40042_DALI
Power	22 W
Nominal current	450 mA
Voltage	48 V
Energy consumption	22 kWh/1000h
Frequency	DC Hz
Protection class	III
Manufacturer of power supply	tuobo
Power factor	1
Useful luminous flux*	2250 lm (360°)
Luminous flux**	1550 lm (360°)
Lamp efficacy	102 lm/W
Luminous intensity	4600 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	35 °
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	DALI
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	404x23x42 mm
For use	Inside
Assembly method	NA SZYNE
Application	Inside
Made in	PRC
Other	DALI ,



## Related documents



 Declaration of Conformity

<p data-bbox="560 255 643 338"><b>48V</b></p> <p data-bbox="675 255 758 338">5 lat gwarancji years warranty</p>  <p data-bbox="247 808 619 857">Montaż oprawy w obrębie szyny na „click” oraz możliwość swobodnego jej przesuwania</p>	<p data-bbox="1241 255 1324 338"><b>48V</b></p> <p data-bbox="1356 255 1439 338">5 lat gwarancji years warranty</p>  <p data-bbox="858 808 1428 835">Luminaire assembly within the track on “click” and its free arrangement</p>
---	--