


Lucca CCT



- IP66 rated die-cast aluminium wall light with opal polycarbonate diffuser suitable for education, commercial and industrial applications
- Tamper-proof stainless steel allen key screws
- One product with integral switches for multi-wattage and selectable CCT options
- Non-dimmable
- Powered by Tridonic

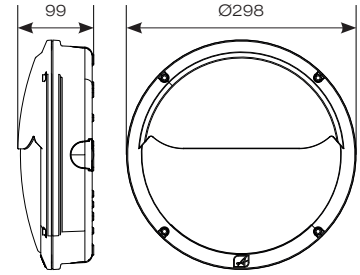

Black



Removable 20mm conduit entry cover for ease of installation



Graphite

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-20°C to 25°C	L70 60,000	Ra 80	5	120°	1	IP66	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALUCLED/B	CCT Selectable - Black	18/27W	3000/4000K	1278/1947lm (4000K, 18/27W)	69/71lm (4000K, 18/27W)	£102.00
ALUCLED/G	CCT Selectable - Graphite					£102.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00	/PC	Electronic Photocell	+ £36.00
/SM3	Self-Test Emergency	+ £121.00	/MWS	Integral Microwave Sensor	+ £48.00
/DM3	DALI Emergency	+ £205.00	/CF	Corridor Function	+ £37.00