


RT 44

451174.002 | Linear luminaires



Linear light fittings
4051859080077
L 721, B 55, H 87

Ceiling mounting, Wall (surface)
pure white (RAL 9010)

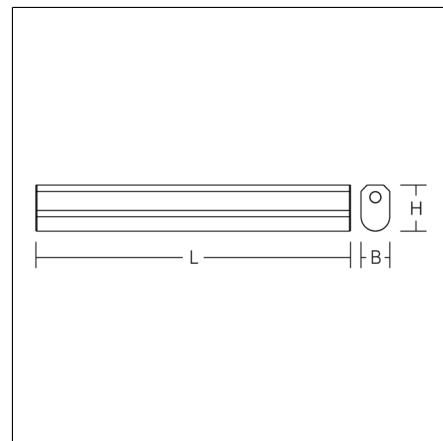

Linear luminaire, can be used as wall and mirror luminaire. Base: aluminium, powder-coated. End caps: plastic (polycarbonate), shock-resistant. Diffuser: plastic (polycarbonate), opal. Suitable for Ceiling mounting, Wall (surface). Can be installed horizontally and vertically. Very easy installation thanks to plug & play connection. With push button switch and Schuko plug socket. Driver integrated. High type of protection: IP44 for use in wet areas.

Product specifications

Length L	721 mm
Width B	55 mm
Height H	87 mm
Weight	1.1 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	920 lm
System power	10 W
System efficiency	92 lm/W
Glare evaluation UGR (4H 8H)	22,9
Beam angle	down 180°/109° up 180°/180°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	120
Luminaires on B16A fuse	200
Luminaires on C10A fuse	120
Luminaires on C16A fuse	200
Inrush current / Inrush current duration	8 A / 60 µs
CIE Flux Code / CEN Flux Code	36 64 85 81 100
Type of protection	IP 44
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK03
Ambient temperature	25 °C
Conformity mark	CE, EAC