



DOWNLIGHT ALU DALI




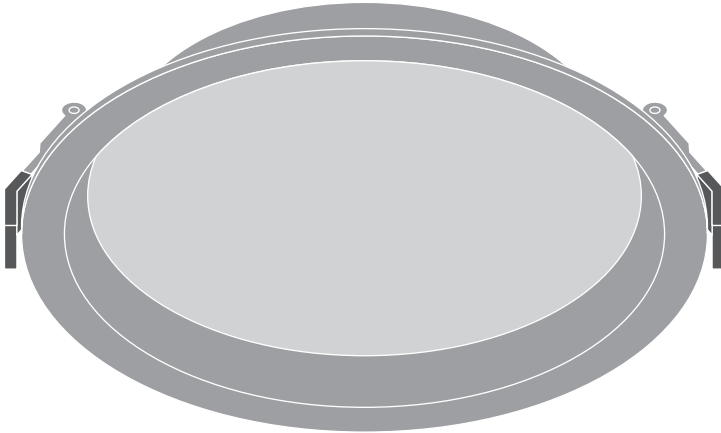








	EAN	Ø x h [mm]	W	V _{AC}	Hz	lm	W (230 V DC)	lm (230 V DC)
DL ALU DALI DN150 14W/3000K WT IP44	4058075202610	160x52	14	220-240V	0/50/60 Hz	1190	4	230
DL ALU DALI DN150 14W/4000K WT IP44	4058075202634	160x52	14	220-240V	0/50/60 Hz	1260	4	240
DL ALU DALI DN150 14W/6500K WT IP44	4058075202658	160x52	14	220-240V	0/50/60 Hz	1330	4	250
DL ALU DALI DN200 25W/3000K WT IP44	4058075091610	215x61	25	220-240V	0/50/60 Hz	2250	6	430
DL ALU DALI DN200 25W/4000K WT IP44	4058075091634	215x61	25	220-240V	0/50/60 Hz	2370	6	450
DL ALU DALI DN200 25W/6500K WT IP44	4058075091658	215x61	25	220-240V	0/50/60 Hz	2370	6	450
DL ALU DALI DN200 35W/3000K WT IP44	4058075091672	215x61	35	220-240V	0/50/60 Hz	2975	8	560
DL ALU DALI DN200 35W/4000K WT IP44	4058075091696	215x61	35	220-240V	0/50/60 Hz	3150	8	600
DL ALU DALI DN200 35W/6500K WT IP44	4058075091719	215x61	35	220-240V	0/50/60 Hz	3150	8	600






	EAN	lm/W	K	IP	IK	∠	R _a	°(°C)	PF	👤
DL ALU DALI DN150 14W/3000K WT IP44	4058075202610	85	3000	44/20	02	100°	≥80	-20...+45	>0.9	0.5 kg
DL ALU DALI DN150 14W/4000K WT IP44	4058075202634	90	4000	44/20	02	100°	≥80	-20...+45	>0.9	0.5 kg
DL ALU DALI DN150 14W/6500K WT IP44	4058075202658	95	6500	44/20	02	100°	≥80	-20...+45	>0.9	0.5 kg
DL ALU DALI DN200 25W/3000K WT IP44	4058075091610	90	3000	44/20	02	100°	≥80	-20...+45	>0.9	0.7 kg
DL ALU DALI DN200 25W/4000K WT IP44	4058075091634	95	4000	44/20	02	100°	≥80	-20...+45	>0.9	0.7 kg
DL ALU DALI DN200 25W/6500K WT IP44	4058075091658	95	6500	44/20	02	100°	≥80	-20...+45	>0.9	0.7 kg
DL ALU DALI DN200 35W/3000K WT IP44	4058075091672	85	3000	44/20	02	100°	≥80	-20...+45	>0.9	0.7 kg
DL ALU DALI DN200 35W/4000K WT IP44	4058075091696	90	4000	44/20	02	100°	≥80	-20...+45	>0.9	0.7 kg
DL ALU DALI DN200 35W/6500K WT IP44	4058075091719	90	6500	44/20	02	100°	≥80	-20...+45	>0.9	0.7 kg



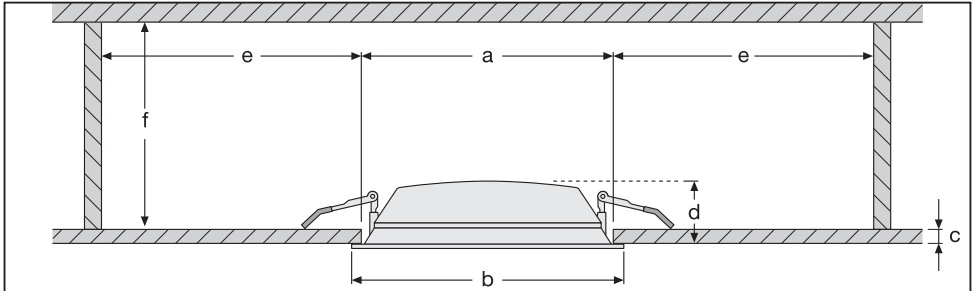


	a	b	c	d	e	f
DOWNLIGHT ALU DALI DN150 14W	ø 145-150 mm	ø 160 mm	5-30 mm	52 mm	≥ 100 mm	≥ 100 mm
DOWNLIGHT ALU DALI DN200 25W	ø 190-205 mm	ø 215 mm	5-30 mm	61 mm	≥ 100 mm	≥ 120 mm
DOWNLIGHT ALU DALI DN200 35W	ø 190-205 mm	ø 215 mm	5-30 mm	61 mm	≥ 100 mm	≥ 120 mm

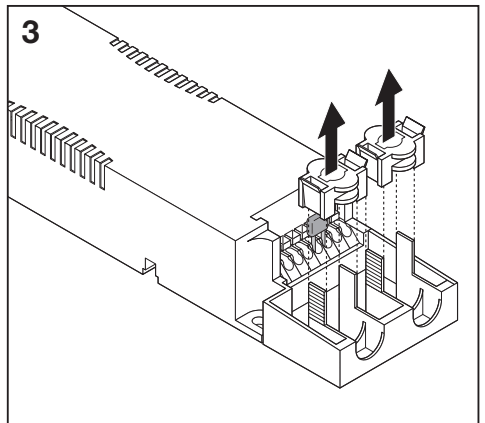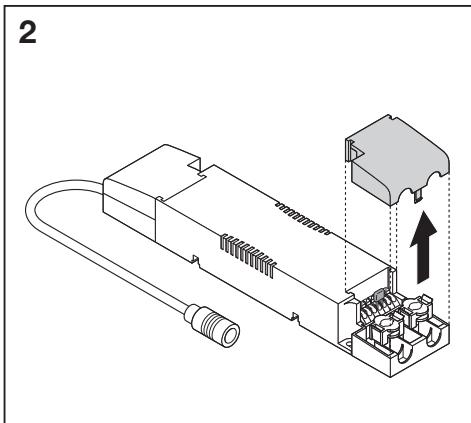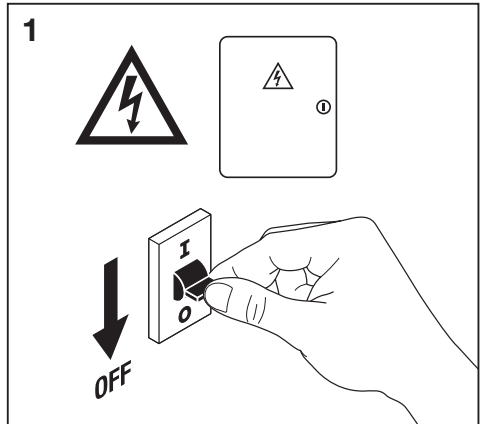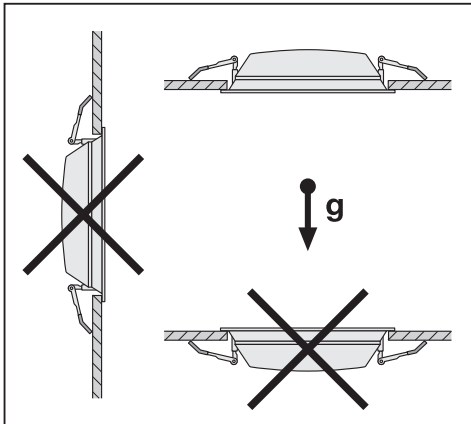

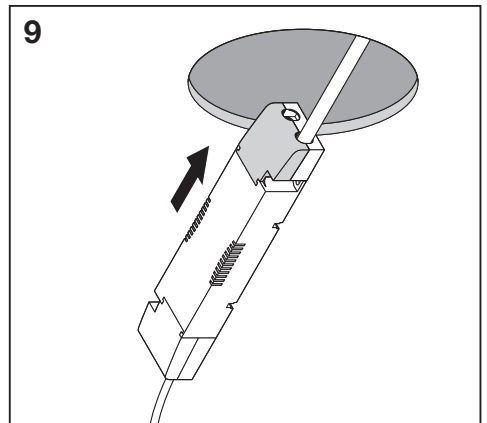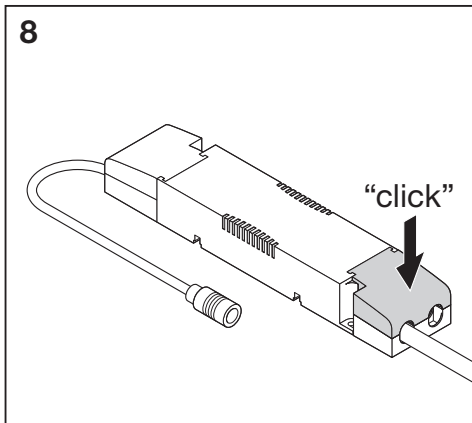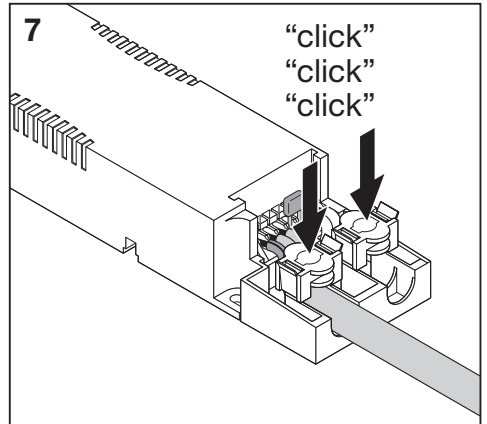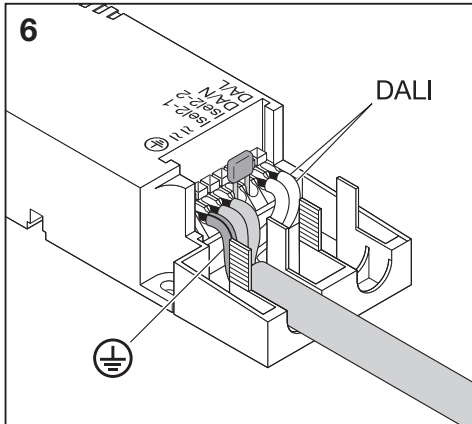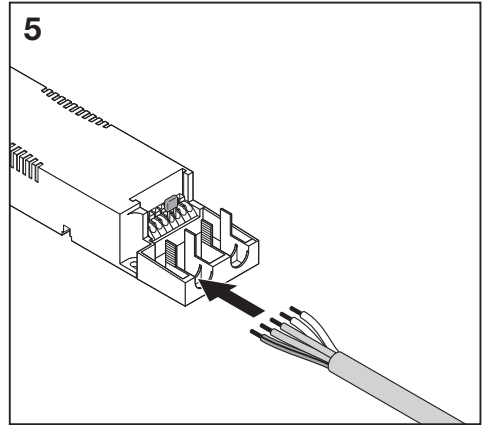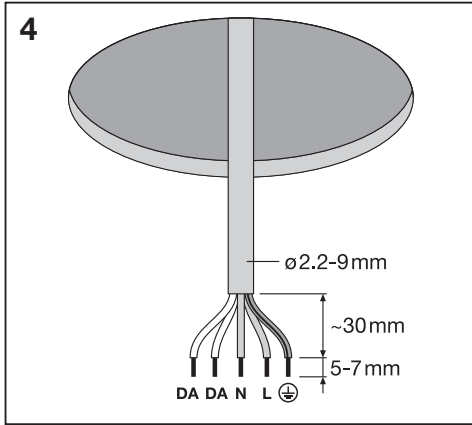

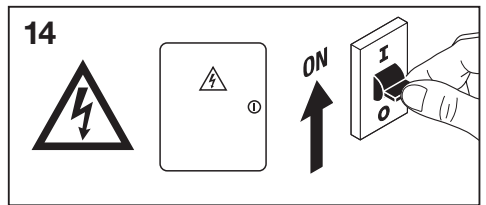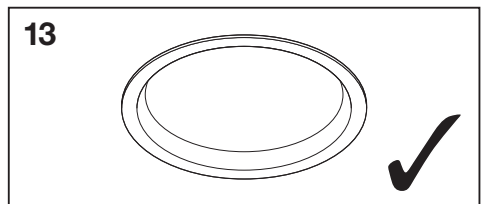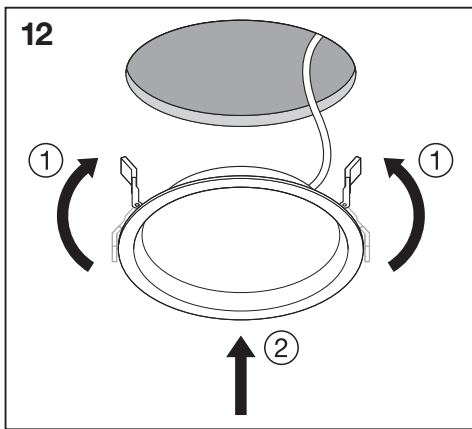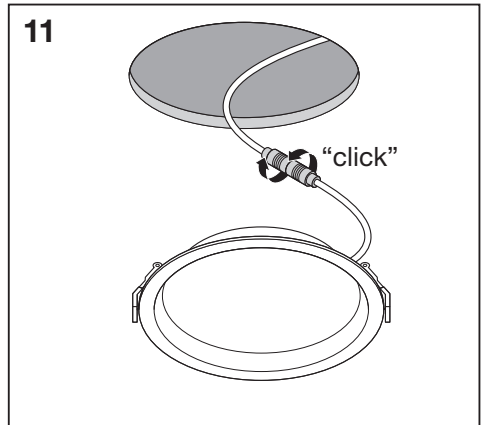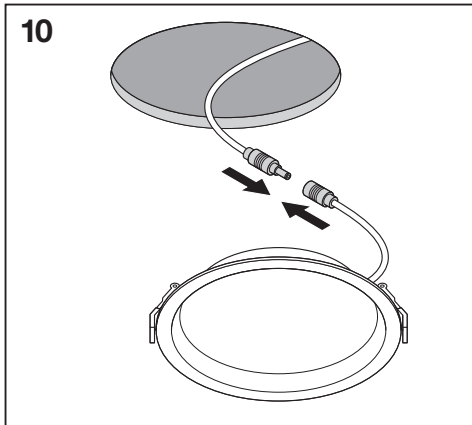

	C10A 	B16A 	C16A 	DALI	I _{OUT} [mA]	R _{I-SELECT} [Ω]
DOWNLIGHT ALU DALI DN150 14W	40	35	64	LCA 17W 250-700mA one4all SC PRE	300	16.7K
DOWNLIGHT ALU DALI DN200 25W	31	32	53	LCA 25W 300-1050mA one4all SC PRE	550	9.2K
DOWNLIGHT ALU DALI DN200 35W	23	23	38	LCA 45W 500-1400mA one4all SC PRE	750	6.7K



C10449057
G11068317
07.02.19



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com