Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN



ļ

	699.310.75			
Series:	Kompakt 37			
MECHANICAL DATA				
Height			175 mm	
Diameter			38 mm	
Materials			PC	
Dome colour			Clear	
Housing colour			Silver	
Protection category			IP65	
Connection			Cable	
cross-sectional area maximum		num	0,34mm² / 22AWG	
Cable entry			Membrane grommet	
Cable entry minimum			d = 1 mm	
Cable entry maximum			d = 9 mm	
Cable length			2000 mm	
Tension relief			Pull-out protection	
Type of fixing			Built-in mounting	
Working temperature minimum		imum	-20°C	
Working temperature maximum		timum	+50°C	
Weight with packaging			202 g	
Product weight			167 g	
ELECTRICAL DATA				
Operating voltage			24V	
Operating voltage type			AC/DC	
Operating voltage frequency		ю	50Hz	
Operating voltage tolerance		ce	+/- 10%	
Rated operational voltage			24 VDC	
Rated operational current			125 mA	
Rated inrush current			500 mA	
Protection class			Protection class 2	
Pollution degree			3	
			In the connection area: 2	
OPTICAL DATA				
Light source			LED	
Light colour			Green Red Yellow	
Optical signal image			Permanent	
Service life	optical		50,000 h maximum	
ACOUSTIC DATA				

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.




Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN

85,0 dB (A)			
Pulse tone			
2900 Hz			
5,000 h minimum			
APPROVAL DATA			
Yes			
Yes			
Yes			
No			
No			
cULus			
Туре 12 Туре 4Х			
No			
No			
Yes			
Yes (WERMA (UK) Ltd.)			
No			

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN

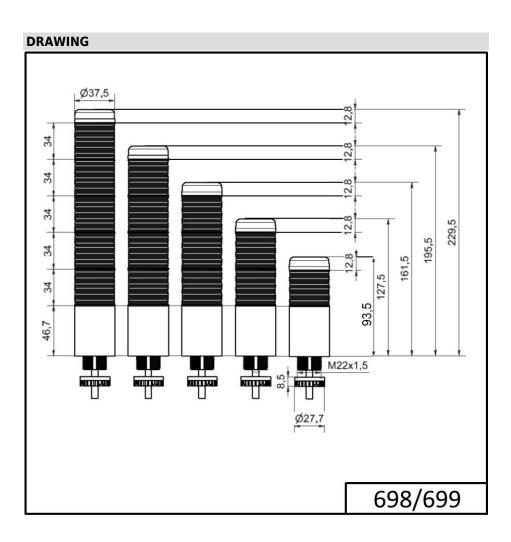

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.