PHILIPS Lighting



MASTER PL-T 2 Pin

MASTER PL-T 18W/840/2P 1CT/5X10BOX

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- \cdot Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Color rendering index (CRI)	80
Cap-Base	GX24D-2 [GX24d-2]		
Flux measurement reference	Sphere	Operating and Electrical	
		Power Consumption	18.0 W
Light Technical		Lamp Current (Nom)	0.225 A
Color Code	840 [CCT of 4000K]		
Luminous Flux	1,150 lumen	Controls and Dimming	
Color Designation	Cool White (CW)	Dimmable	No
Chromaticity Coordinate X (Nom)	0.38		
Chromaticity Coordinate Y (Nom)	0.38	Approval and Application	
Correlated Color Temperature (Nom)	4000 K	Mercury (Hg) Content (Max)	1.4 mg
Luminous Efficacy (Rated) (Min)	67 lm/W	Mercury (Hg) Content (Nom)	1.4 mg

MASTER PL-T 2 Pin

Energy Consumption kWh/1000 h	18 kWh	
EPREL Registration Number	423,340	
Product Data		
Full product code	871150061061470	
Order product name	MASTER PL-T 18W/840/2P 1CT/5X10BOX	
Order code	927914384071	

Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	50	
Material number (12NC)	927914384071	
Full product name	MASTER PL-T 18W/840/2P 1CT/5X10BOX	
EAN/UPC - Case	8711500610751	


Dimensional drawing



Product D (max) A (max) B (max) C (max) MASTER PL-T 18W/840/2P 1CT/5X10BCX 41 mm 71.8 mm 96.0 mm 192.0 mm

Photometric data

Lifetime



Spectral Power Distribution Colour - MASTER PL-T 18W/840/2P 1CT/5X10BOX


100 100 Lamp survival (%) Lamp survival (%) 90 90 ElectroMagnetic ElectroMagnetic 80 80 70 70 60 60 50 50 3500 7000 10500 14000 3500 7000 14000 0 0 10500 Operating time (hours) Operating time (hours)

Life Expectancy Diagram - MASTER PL-T 18W/840/2P 1CT/5X10BOX

Life Expectancy Diagram - MASTER PL-T 18W/840/2P 1CT/5X10BOX

MASTER PL-T 2 Pin

Lifetime

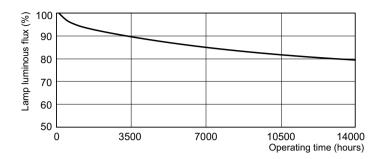

Lumen Maintenance Diagram - MASTER PL-T 18W/840/2P 1CT/5X10BOX



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 15 - data subject to change