


# Unity GC Pro Fixed Downlight



- Compact high performance architectural adjustable downlight suitable for residential applications
- Deep cut-off angle for glare control and comfort
- Die-cast aluminium construction, powder coated
- Mirror finished anodized reflector for optimum light control
- Remote driver with plug and play connection
- Powered by HEP

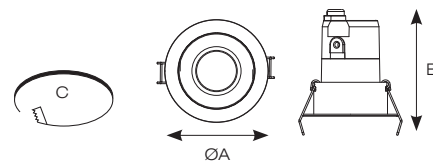

**A** Architectural  
Downlight



Powered by  
**CASAMBI**



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-20°C to 25°C	L80 82,000	Ra 90	3	30°	2	IP44

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	A	B	C	TRADE
AULEDGCP1/CW	Cool White	3W	4000K	121lm	40lm	<10	48mm	48mm	40mm	£36.45
AULEDGCP1/WW	Warm White	3W	3000K	113lm	38lm	<10	48mm	48mm	40mm	£36.45
AULEDGCP2/CW	Cool White	8W	4000K	262lm	33lm	<10	65mm	70mm	55mm	£52.50
AULEDGCP2/WW	Warm White	8W	3000K	252lm	32lm	<10	65mm	70mm	55mm	£52.50
AULEDGCP3/CW	Cool White	15W	4000K	629lm	42lm	<10	78mm	81mm	68mm	£67.50
AULEDGCP3/WW	Warm White	15W	3000K	586lm	39lm	<10	78mm	81mm	68mm	£67.50

\* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
/OCTO	OCTO Smart Control	+ £155.00	ACFLP/3	LED Emergency Lighting Pack *	£120.00
/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00		* (3W and 8W Only)	