



FG

MASTER VALUE LEDspot PAR

MAS LEDspot VLE D 6-50W 927 PAR20 25D

With its robust design and warm-white beam of light, these new-generation PAR lamps are ideal for general lighting and spot lighting in the hospitality industry. It's a dimmable solution. They are especially suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. The product offers more energy saving comparing with normal LED spots.

Product data

General Information	
Cap-Base	E27
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	927 [CCT of 2700K]
Beam Angle (Nom)	25 degree(s)
Luminous Flux	500 lm
Luminous Intensity (Nom)	1,500 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	83 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	500 lm

Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	6 W
Lamp Current (Nom)	40 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Only with specific dimmers


Datasheet, 2025, March 17 data subject to change

MASTER VALUE LEDspot PAR

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	PAR20
Net Weight (Piece)	0.080 kg
Approval and Application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	6 kWh
EPREL Registration Number	1121750
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4


Application Conditions		
can it be used in closed luminaires	No	
Product Data		
Order product name	MAS LEDspot VLE D 6-50W 927	
	PAR20 25D	
Full product name	MAS LEDspot VLE D 6-50W 927	
	PAR20 25D	
Full product code	871951444304400	
Order code	929003485702	
Material Nr. (12NC)	929003485702	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8719514443044	
Numerator - Packs per outer box	6	
EAN/UPC - Case	8719514443051	

Dimensional drawing




Product	D	С
MAS LEDspot VLE D 6-50W 927 PAR20 25D	65 mm	85 mm

Photometric data






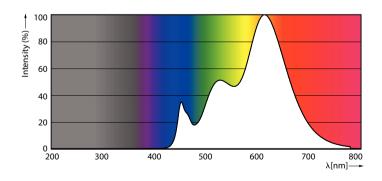

Spectral Power Distribution Colour - MAS LEDspot VLE D 6-50W 927 PAR20 25D


MASTER VALUE LEDspot PAR


Photometric data



Light Distribution Diagram - MAS LEDspot VLE D 6-50W 927 PAR20 25D

Lifetime

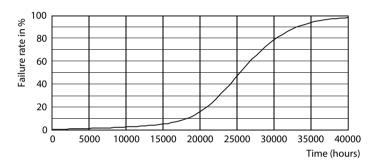

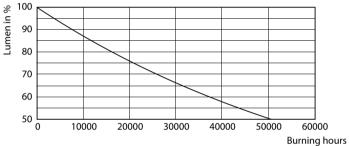

Life Expectancy Diagram

Lumen Maintenance Diagram - MAS LEDspot VLE D 6-50W 927 PAR20 25D



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.