


10344300	DATA SHEET	
Valid from: 17.09.2018	EPIC[®] MCS 8 RJ45 / MCB 8 RJ45	

Description

- The mixed assembly guarantees high flexibility. For applications in mechanical and plant engineering, for printing machines and slide-in technology.
- Assembly of individual connectors, suitable for different applications



General Characteristics

Series	MC Module
Version	Male / Female (Article 10345300)
Number of Contacts	4 Power + 8 Data
Termination Methods	Power: crimp termination: 0.14 - 2.5 mm ² , Data: IDC/piercing termination: Cat5, AWG 24-26
Temperature Range	-20°C to +85°C


Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----





Electrical Characteristics

Rated Voltage	max. 600V / max. 125V
Rated Current	max.10 A / max.1.5 A
Degree of Soiling	3

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10344300EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

10344300	DATA SHEET	
Valid from: 17.09.2018	EPIC® MCS 8 RJ45 / MCB 8 RJ45	

Technical Drawing

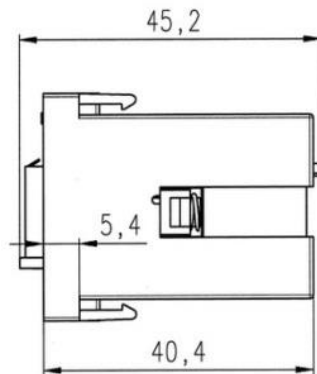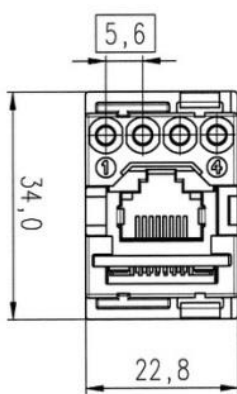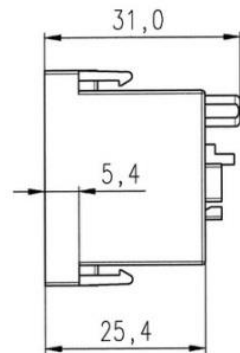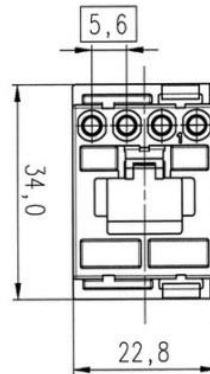

Automation



Industrial machinery and plant engineering



Wind Energy

Info

Power and signal modules can be used together in one housing

Application range

Plant engineering
Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10344300EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------