PHILIPS Lighting

MasterConnect LEDtube EM/mains T8

MC LEDtube IA 1200mm UO 16W840 T8

Introducing MasterConnect LEDtubes - smart retrofit LED T8 lamps that give you an easy and seamless way to upgrade to connected lighting. Simply set up with an intuitive app and MasterConnect LED tube lighting can be programmed to maximize energy savings, while providing wireless and automated light for your comfort and convenience. What's more, it is fully scalable and upgradable. If you want to enjoy additional benefits such as remote control or a management dashboard, you can simply keep the lamps you currently have installed and add a gateway to experience all the advantages of a cloud-based system. There's no better way to take lighting solutions to the next level.

Product data

General Information					
Cap-Base	G13 [Medium Bi-Pin Fluorescent]				
Nominal lifetime	60,000 hour(s)				
Switching Cycle	200,000				
Lighting Technology	LED				
Flux measurement reference	Sphere				
Light Technical					
Color Code	840 [CCT of 4000K]				
Beam Angle (Nom)	160 degree(s)				
Luminous Flux	2,500 lumen				
Color Designation	Cool White (CW)				
Correlated Color Temperature (Nom)	4000 K				
Luminous Efficacy (rated) (Nom)	156 lm/W				
Color Consistency	<6				
Color rendering index (CRI)	83				

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	16 W

LLMF At End Of Nominal Lifetime (Nom) 70 %


Power Consumption	16 W			
Starting Time (Nom)	0.5 s			
Warm-up time to 60% light	0.5 s			
Power Factor (Fraction)	0.9			
Voltage (Nom)	220-240 V			
Temperature				
Ambient temperature range	-20 °C to 45 °C			
T-Case Maximum (Nom)	50 ℃			

MasterConnect LEDtube EM/mains T8


Controls and Dimming					
Dimmable	Wireless Dim				
Mechanical and Housing					
Product Length	1,200 mm				
Bulb Shape	Tube, double-ended				
Approval and Application					
Energy Saving Product	Yes				
Approval Marks	RoHS compliance TUV CE marking KEMA Keur				
	certificate				
Energy Consumption kWh/1000 h	16 kWh				
EPREL Registration Number	406,200				
CE mark	Yes				

EU RoHS compliant	Yes			
Product Data				
Full product code	871869966970600			
Order product name	MC LEDtube IA 1200mm UO 16W840 T8			
Order code	929002210402			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material number (12NC)	929002210402			
Full product name	MC LEDtube IA 1200mm UO 16W840 T8			
EAN/UPC - Case	8718699669713			

Dimensional drawing




Photometric data



Light Distribution Diagram - MC LEDtube IA 1200mm UO 16W840 T8


Product	D1	D2	A1	A2	A3
MC LEDtube IA 1200mm UO	25.8 mm	28 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm
16W840 T8					




Spectral Power Distribution Colour - MC LEDtube IA 1200mm UO 16W840 T8

MasterConnect LEDtube EM/mains T8


Photometric data




Lifetime

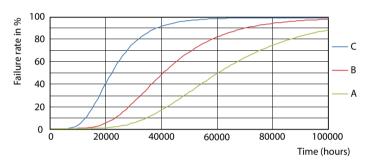




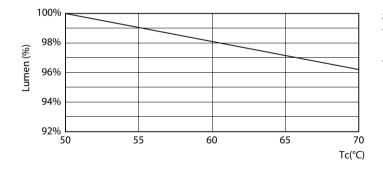

Lumen Maintenance Diagram - MC LEDtube IA 1200mm UO 16W840 T8

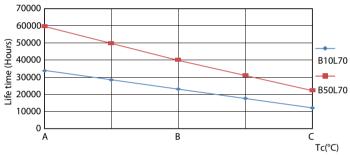




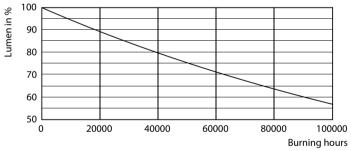



MasterConnect LEDtube EM/mains T8

Lifetime

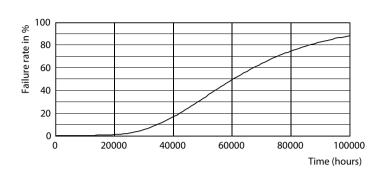

Life Expectancy Diagram - MC LEDtube IA 1200mm UO 16W840 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 22 - data subject to change