

## KS 8.10 FL40 STTZN (321 045)


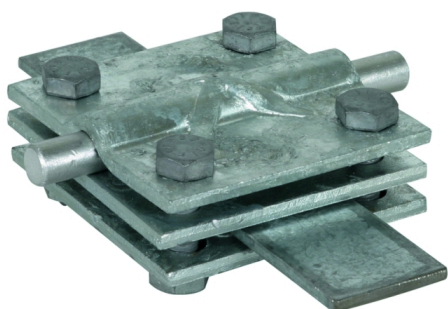




Figure without obligation



Type	KS 8.10 FL40 STTZN
Part No.	321 045
Material of clamp	St/tZn
Clamping range Rd / FI	8-10 / 30-40 mm
Clamping range FI / FI	30-40 / 30-40 mm
Screw	 M8 x 30 mm
Material of screw / nut	St/tZn
Dimensions	70 x 70 x 3 mm
Intermediate plate	yes
Lightning current carrying capability (10/350 µs)	 100 kA <sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	12.6 kA
Zinc coating acc. EN 1461	~50 µm
Weight	413 g
Customs tariff number	85389099
GTIN	4013364021518
PU	25 Stk

<sup>\*)</sup> See test certificate for exact classification.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.