

## FS 22 16 10 2500 SK AL V2A (123 425)


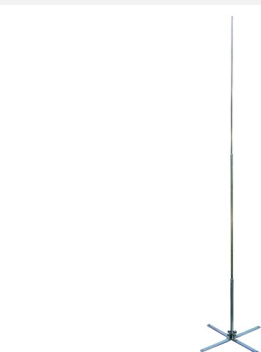


Figure without obligation



| Type                            | FS 22 16 10 2500 SK AL V2A |
|---------------------------------|----------------------------|
| Part No.                        | 123 425                    |
| Total length (Ø22 / 16 / 10 mm) | 2500 mm                    |
| Length (Ø16 / 10 mm)            | 2000 mm                    |
| Length (Ø22 mm)                 | 500 mm                     |
| Max. gust wind speed            | 187 km/h                   |
| Profile distance                | 230-520 mm                 |
| Fixing                          | [4x] Ø11 mm                |
| Material of braces              | StSt                       |
| Material of air-termination rod | Al                         |
| Material of nut / washer        | StSt                       |
| Thread                          | M 16                       |
| Standard                        | EN 62561-(1+2)             |
| Weight                          | 2,82 kg                    |
| Customs tariff number           | 85389099                   |
| GTIN                            | 4013364129009              |
| PU                              | 1 Stk                      |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Special lengths of all air-termination rods / self-supporting air-termination rods are available upon request.