PHILIPS Lighting



MASTER PL-C 2 Pin

MASTER PL-C 26W/840/2P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


- 11 C - 11					
General Information		Color rendering index (CRI)	80		
Cap-Base	G24D-3 [G24d-3]				
Flux measurement reference	Sphere	Operating and Electrical			
		Power Consumption	26.5 W		
Light Technical		Lamp Current (Nom)	0.335 A		
Color Code	840 [CCT of 4000K]				
Luminous Flux	1,800 lumen	Controls and Dimming	Controls and Dimming		
Color Designation	Cool White (CW)	Dimmable	No		
Chromaticity Coordinate X (Nom)	0.38				
Chromaticity Coordinate Y (Nom)	0.38	Approval and Application			
Correlated Color Temperature (Nom)	4000 K	Mercury (Hg) Content (Max)	1.4 mg		
Luminous Efficacy (rated) (Nom)	68 lm/W	Mercury (Hg) Content (Nom)	1.4 mg		

MASTER PL-C 2 Pin

BOX


Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	50			
Material number (12NC)	927906184040			
Full product name	MASTER PL-C 26W/840/2P 1CT/5X10BOX			
EAN/UPC - Case	8711500715968			

Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 26W/840/2P 1CT/	27.1 mm	27.1 mm	130.5 mm	149.0 mm	171.4 mm
5X10BOX					

Photometric data




Spectral Power Distribution Colour - MASTER PL-C 26W/840/2P 1CT/5X10BOX

Lifetime

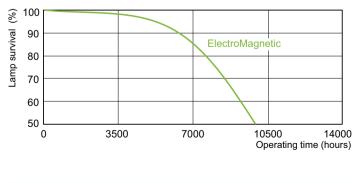




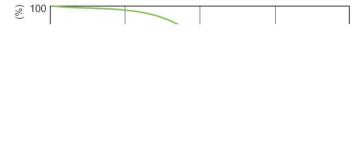

Life Expectancy Diagram - MASTER PL-C 26W/840/2P 1CT/5X10BOX

MASTER PL-C 2 Pin

Lifetime

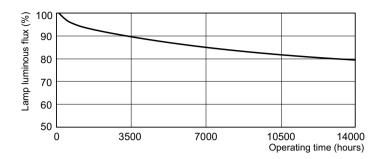

Lumen Maintenance Diagram - MASTER PL-C 26W/840/2P 1CT/5X10BOX



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 16 - data subject to change