

# Product Data Sheet


## GW66681

IB Range



For walls	Masonry	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP44
Mechanical resistance	IK08	Houseable IB socket-outlets	16/32 A
For socket-outlets	SBF horizontal	Electrocod	2220
Drilling bottom	Through multidiameter cutter	Minimum installation temperature	-15°C

### DIMENSIONAL

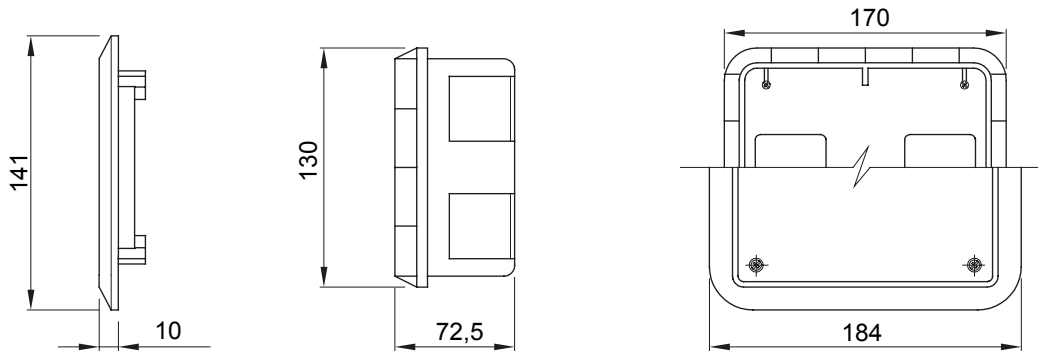

### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**IP**

IP44

**IK**

IK08

### STANDARDS/APPROVALS

