


GSUN S

671983.002.2.89 | Luminaires for escape route identification



Ceiling and wall luminaires
4051859397182
L 247, B 45, H 195

Ceiling mounting, Wall (surface)
white

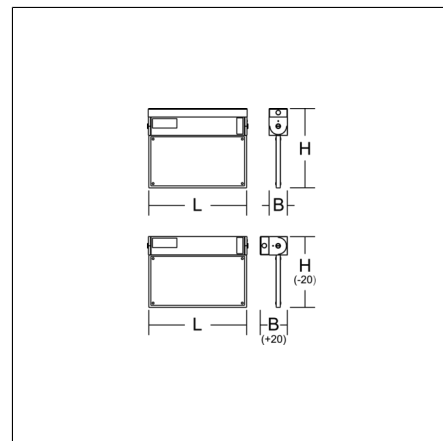

Luminaire for escape route identification. Housing: extruded aluminium profile, powder-coated. Includes 4 plastic foils with escape route motifs and 1 white plastic foil with mounting pins to attach them with. Universal mounting kit for ceiling and wall surface mounting. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units.

Product specifications

| | |
|---|--------------------------------|
| Typ of emergency lighting | Central battery system |
| Monitoring | Luxifair AC-Control |
| Battery | without |
| Operating mode | maintained power mode |
| Viewing Distance | 24 m |
| Length L | 247 mm |
| Width B | 45 mm |
| Height H | 195 mm |
| Weight | 1 kg |
| Light source | LED |
| Colour temperature | 4000 K |
| System power, mains operation | 4,7 W |
| System power, emergency operation | 4,7 W |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Not necessary |
| Control | on/off |
| Voltage | 220 - 240 V / 0 Hz, 50 - 60 Hz |
| Luminaires on B10A fuse | 17 |
| Luminaires on B16A fuse | 27 |
| Luminaires on C10A fuse | 28 |
| Luminaires on C16A fuse | 45 |
| Inrush current / Inrush current duration | 27 A / 250 µs |
| Type of protection | IP 30 |
| Protection class | I |
| Filament test | 650°C - 30 seconds |
| Impact resistance | IK03 |
| Ambient temperature for maintained power | -10 °C ... + 40 °C |
| Ambient temperature for non-maintained power mode | -10 °C ... + 40 °C |
| Conformity mark | CE |

Accessories



981780.002.1
Mounting kit for chains/cable suspensions



981883.002.1
Recessed mounting frame

GSUN S

671983.002.2.89 | Luminaires for escape route identification



981779.002.1
Wall bracket



981777.032.1
Suspension system



982763.000
Suspension cable set