



**Classia** - One-way switch lightable with led lamp  
 - Two-way switch lightable with led lamp  
 - Four-way switch lightable with led lamp  
 - Pushbutton lightable with led lamp


RW4001L - RA4001L - RG4001L --- RW4001M2L - RA4001M2L - RG4001M2L  
 RW4001LA - RG4001LA --- RW4001LR - RG4001LR  
 RW4003L - RA4003L - RG4003L --- RW4003M2L - RA4003M2L - RG4003M2L  
 RW4004L - RA4004L - RG4004L --- RW4004M2L - RA4004M2L - RG4004M2L  
 RW4005L - RA4005L - RG4005L --- RW4005M2L - RA4005M2L - RG4005M2L --- RW4043 - RA4043 - RG4043  
 RW4042V12 - RG4042V12 --- RW4042V230 - RA4042V230 - RG4042V230




..4001L  
 ..4003L  
 ..4005L




..4001M2L  
 ..4003M2L  
 ..4005M2L



..4004L



..4004M2L



..4001..  
 ..4042...  
 ..4043

### Use

Rocker control device for lighting and other loads.


### Range

| Designation                                      | Item 1 Module                                  | Item 2 Modules                                | Led Lamp |
|--|--|---|----------|
| One-way switches<br>1P 10AX 250 Va.c.            | <input type="checkbox"/> RW4001L               | <input type="checkbox"/> RW4001M2L            | 230V     |
|  | <input type="checkbox"/> RA4001L               | <input type="checkbox"/> RA4001M2L            |          |
|  | <input checked="" type="checkbox"/> RG4001L    | <input checked="" type="checkbox"/> RG4001M2L |          |
|  | <input type="checkbox"/> RW4001LR              |   | 230V     |
|  | <input checked="" type="checkbox"/> RG4001LR   |   |          |
|  | <input type="checkbox"/> RW4001LA              |   |          |
| Two-way switches<br>1P 10AX 250 Va.c.            | <input type="checkbox"/> RW4003L               | <input type="checkbox"/> RW4003M2L            | 230V     |
|  | <input type="checkbox"/> RA4003L               | <input type="checkbox"/> RA4003M2L            |          |
|  | <input checked="" type="checkbox"/> RG4003L    | <input checked="" type="checkbox"/> RG4003M2L |          |
| Four-way switches<br>Intermediate 10AX 250 Va.c. | <input type="checkbox"/> RW4004L               | <input type="checkbox"/> RW4004M2L            | 230V     |
|  | <input type="checkbox"/> RA4004L               | <input type="checkbox"/> RA4004M2L            |          |
|  | <input checked="" type="checkbox"/> RG4004L    | <input checked="" type="checkbox"/> RG4004M2L |          |
| Pushbuttons<br>1P (NO) 10A 250 Va.c.             | <input type="checkbox"/> RW4005L               | <input type="checkbox"/> RW4005M2L            | 230V     |
|  | <input type="checkbox"/> RA4005L               | <input type="checkbox"/> RA4005M2L            |          |
|  | <input checked="" type="checkbox"/> RG4005L    | <input checked="" type="checkbox"/> RG4005M2L |          |
|  | <input type="checkbox"/> RW4043                |   | 230V     |
|  | <input type="checkbox"/> RA4043                |   |          |
|  | <input checked="" type="checkbox"/> RG4043     |   |          |
|  | <input type="checkbox"/> RW4042V230            |   | 230V     |
|  | <input type="checkbox"/> RA4042V230            |   |          |
|  | <input checked="" type="checkbox"/> RG4042V230 |   |          |
|  | <input type="checkbox"/> RW4042V12             |   | 12V      |
|  | <input checked="" type="checkbox"/> RG4042V12  |   |          |

Color code:

White colour     Aluminum colour     Black colour

### Overall dimensions (mm)

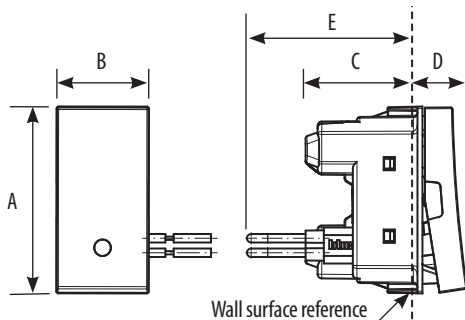

| ..4001../..4003../..4042../..4043 | A    | B    | C    | D    | E    |
|-----------------------------------|------|------|------|------|------|
| 1 Module                          | 45.1 | 22.3 | 27   | 11.9 | 29.5 |
| 2 Modules                         | 45.1 | 44.7 | 27   | 11.9 | 29.5 |
| ..4004..                          | A    | B    | C    | D    | E    |
| 1 Module                          | 45.1 | 22.3 | 28.1 | 11.9 | 30.6 |
| 2 Modules                         | 45.1 | 44.7 | 28.1 | 11.9 | 30.6 |

### Connection

Terminal type: screw clamp  
 Terminal capacity: 2 x 4 mm<sup>2</sup> max  
 Stripping length: 9 mm  
 Compatible with flexible or rigid cables

### Technical characteristics

#### - Protection index

(considering a complete installation, including cover plate)  
 Penetration by solid bodies/liquid: IP40

#### - Mechanical characteristics

Impact test: IK 04

#### - Material characteristics

Material:  
 Case: PC (Polycarbonate)  
 Key cover: ABS - ABS/PC  
 UV resistant.

#### Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place  
 650° C / 30 s for other parts made of insulating materials

#### - Electrical characteristics

Voltage: 250 V a.c.  
 Current: 10AX for ..4001../..4003../..4004..  
 Current: 10A for ..4005../..4042../..4043

#### - Climatic characteristics

Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

### Cleaning

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards IEC/EN 60669-1.  
 Refer to e.catalogue.