



CorePro LEDspot MV



Corepro LEDspot 550lm GU10 830 120D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. These GU10 LED spot lights are compatible with most existing fixtures with a GU10 LED base and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots deliver significant energy savings and minimize maintenance costs.

Product data

General Information	
Cap-Base	GU10
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	120 degree(s)
Luminous Flux	550 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	112 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz

Power Consumption	4.9 W
Lamp Current (Nom)	40 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Shape	PAR16
Net Weight (Piece)	0.045 kg
Approval and Application	
Energy Efficiency Class	E
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	5 kWh
EPREL Registration Number	1825202


Datasheet, 2025, March 17 data subject to change

CorePro LEDspot MV

EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per	1
EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.6
Application Conditions	
can it be used in closed luminaires	No
Product Data	
Order product name	Corepro LEDspot 550lm GU10 830
	120D


Corepro LEDspot 550lm GU10 830 120D 871951430875600	
871951430875600	
020002001202	
929002981202	
929002981202	
1	
8719514308756	
10	
8719514308763	


Dimensional drawing



Product	D	С
Corepro LEDspot 550lm GU10 830 120D	50 mm	54 mm

Photometric data

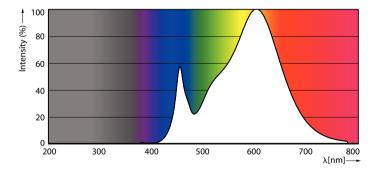




Spectral Power Distribution Colour - Corepro LEDspot 550lm GU10 830 120D

Light Distribution Diagram - Corepro LEDspot 550lm GU10 830 120D

120°

CorePro LEDspot MV


Photometric data




Calculus Photographics 4.5 Philips Lighting SLV. Page: 17

General uniform lighting - Corepro LEDspot 550lm GU10 830 120D

Lifetime

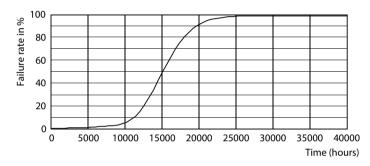

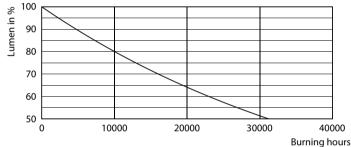

Life Expectancy Diagram

Lumen Maintenance Diagram - Corepro LEDspot 550lm GU10 830 120D



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.