

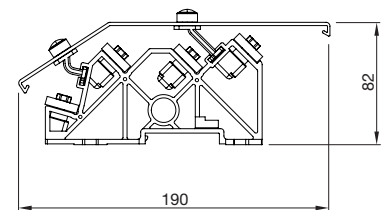
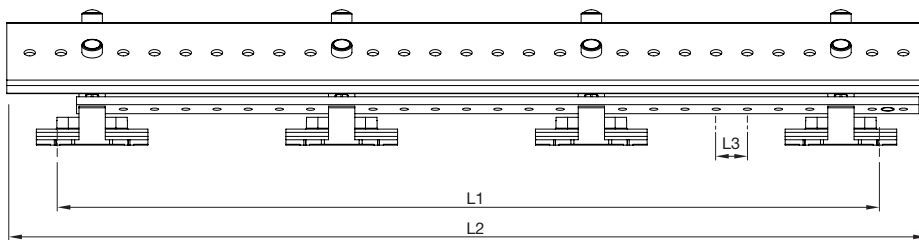



GW 45 545  
GW 45 546

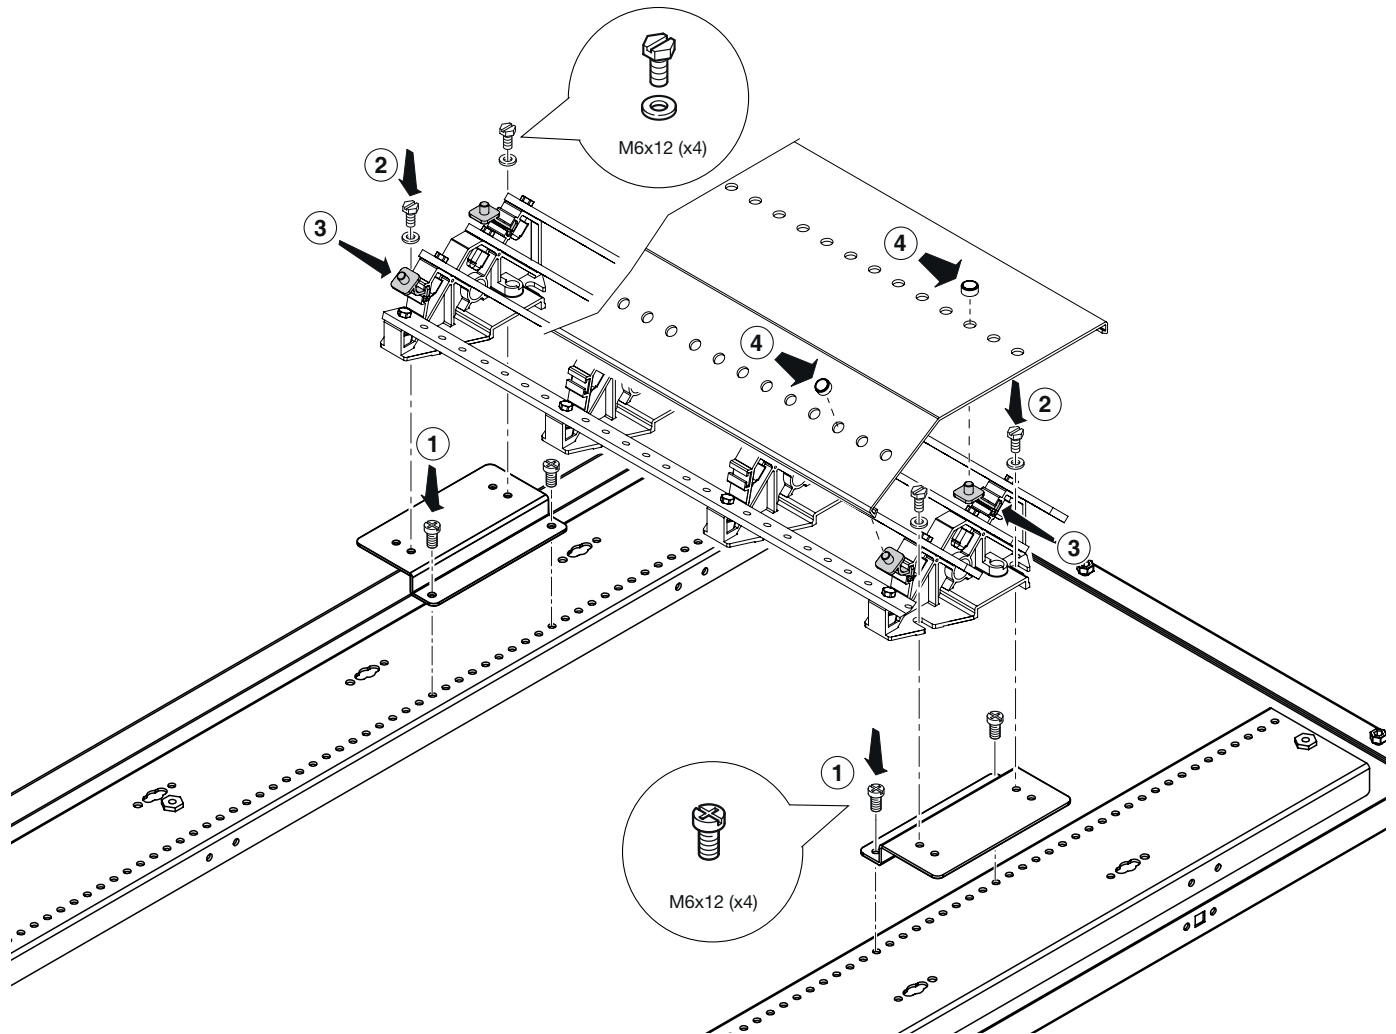



Cod.	Busbar	In	L1	L2	L3	Input	Output
GW 45 545	20x5 mm	250A	418	560	19	1xM8+2xM6	21xM6
GW 45 546	20x5 mm	250A	618	788	19	1xM8+2xM7	32xM6

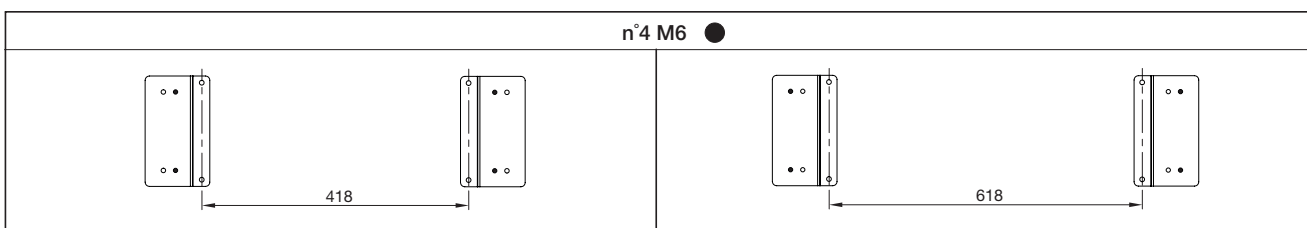


**GW 45 547**  
**GW 45 548**

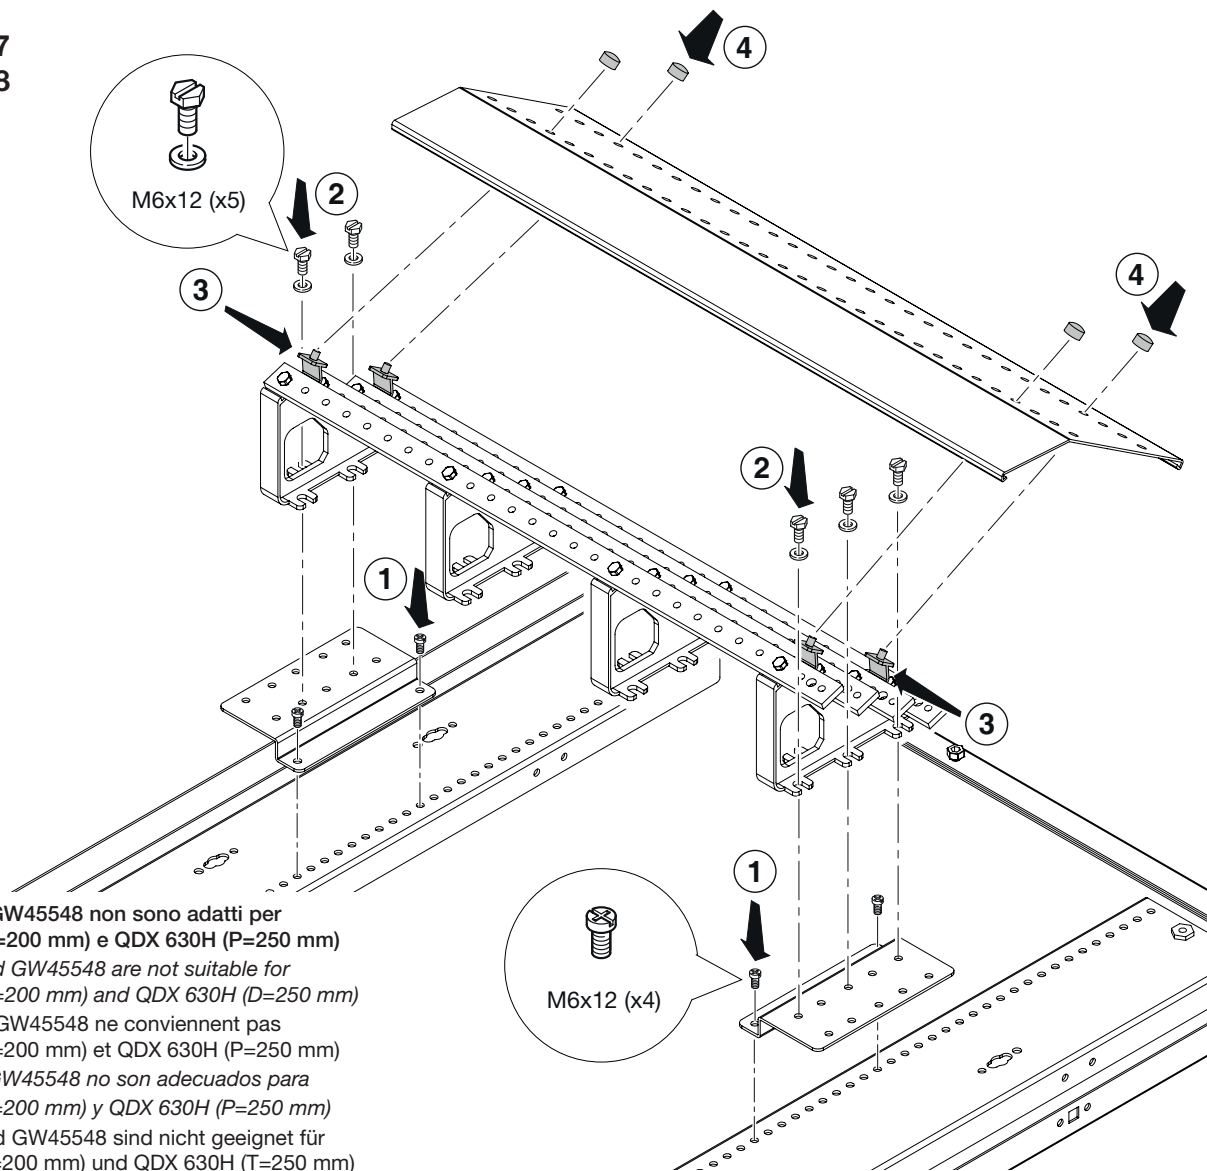

GW45547 e GW45548 non sono adatti per QDX 630L (P=200 mm) e QDX 630H (P=250 mm)  
 GW45547 and GW45548 are not suitable for QDX 630L (D=200 mm) and QDX 630H (D=250 mm)  
 GW45547 et GW45548 ne conviennent pas QDX 630L (P=200 mm) et QDX 630H (P=250 mm)  
 GW45547 y GW45548 no son adecuados para QDX 630L (P=200 mm) y QDX 630H (P=250 mm)  
 GW45547 und GW45548 sind nicht geeignet für QDX 630L (T=200 mm) und QDX 630H (T=250 mm)

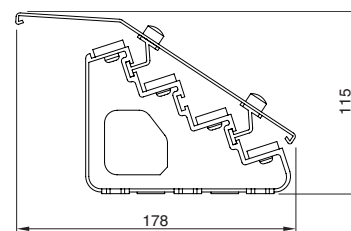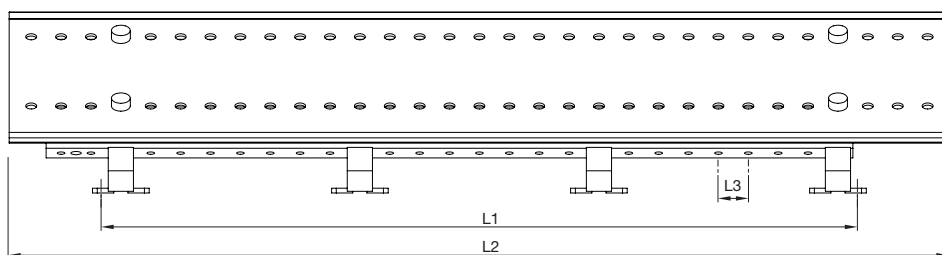

Cod.	Busbar	In	L1	L2	L3	Input	Output
GW 45 547	25x6 mm	400A	418	598	19	1xM8+2xM6	21xM6
GW 45 548	25x6 mm	400A	618	830	19	1xM8+2xM7	32xM6

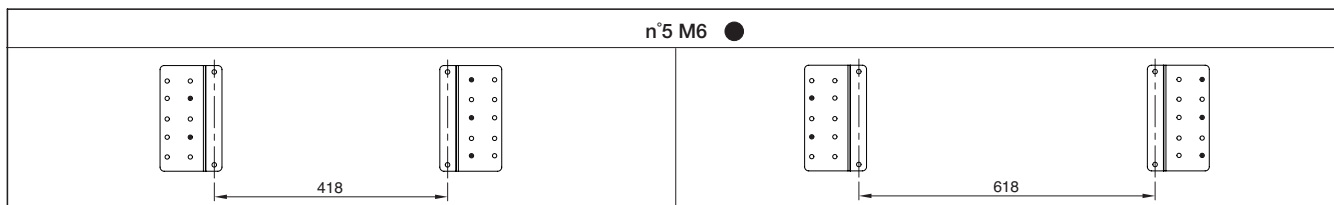

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111

8.30 - 12.30 / 14.00 - 18.00  
 lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com  
 www.gewiss.com