


Beacon Emergency Adjustable Downlight



- LED Non-Maintained adjustable die-cast aluminium downlight
- 3 hour emergency output
- Power and green charge LED are discreetly incorporated within the head

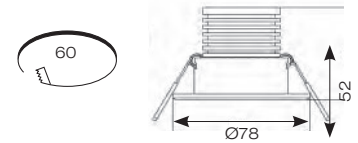

***	Escape route 2 metres wide (1 Lux minimum) *			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)				
2.5	2	6	2	6
4	2.5	7	2.5	7
6	-	-	-	-

***	Open (Anti-Panic) area (0.5 Lux Minimum) **			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)				
2.5	2.25	5.7	2.25	5.7
4	2.5	7.1	2.5	7.1
6	3	8.25	3	8.25

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 40°C	L70 50,000	22°	1	IP20	IK10

CODE	DESCRIPTION	WATTAGE	CCT	EMERGENCY MODE	TRADE
ABLED/3NM	Non-Maintained	5W	6500K	266lm	£74.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASBP/9/LI	3.2V 5500mAh-5 Li-FePO4 Replacement Battery	£19.70