


**UEBL L170 B5.2 6.5 AL (377 016)**



Figure without obligation

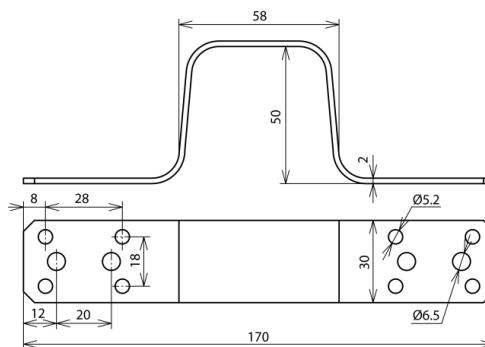

Arrangement:

Type	UEBL L170 B5.2 6.5 AL
Part No.	377 016
Material	Al
Dimensions	30 x 2 mm
Length	170 mm
Fixing	[8x] Ø5.2 / [4x] Ø6.5 mm
Application note	according to DIN EN 62305-3 Supplement 1, materials $\geq 0.5\text{mm}$ thick shall be connected by 4 rivets Ø5mm, materials $\geq 2\text{mm}$ thick by 2 rivets Ø6mm, or materials $\geq 2\text{mm}$ thick by 2 tapping screws Ø6.3mm StSt
Fixing possibility	blind rivets or drilling screws
Lightning current carrying capability (10/350 $\mu\text{s}$ )	100 kA <sup>*)</sup>
Standard	EN 62561-1
Weight	36 g
Customs tariff number	85389099
GTIN	4013364083417
PU	50 Stk

<sup>\*)</sup> For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Bridging brackets with middle hole may be combined with KS connectors (e.g. Part No. 301 019).