


GSUN S

671985.002.2.89 | Luminaires for escape route identification



Ceiling and wall luminaires
4051859397304
L 327, B 45, H 237

Ceiling mounting, Wall (surface)
white

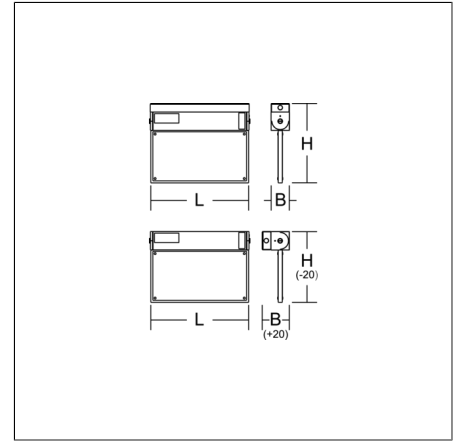

Luminaire for escape route identification. Housing: extruded aluminium profile, powder-coated. Includes 4 plastic foils with escape route motifs and 1 white plastic foil with mounting pins to attach them with. Universal mounting kit for ceiling and wall surface mounting. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Viewing Distance	32 m
Length L	327 mm
Width B	45 mm
Height H	237 mm
Weight	1.35 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	5,5 W
System power, emergency operation	5,5 W
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	29
Luminaires on C10A fuse	36
Luminaires on C16A fuse	58
Inrush current / Inrush current duration	3.3 A / 400 µs
Type of protection	IP 30
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Accessories



981780.002.1
Mounting kit for chains/cable suspensions



981884.002.1
Recessed mounting frame

GSUN S

671985.002.2.89 | Luminaires for escape route identification



981797.002.1
Wall bracket



981777.032.1
Suspension system



982763.000
Suspension cable set