## **Relay Sockets** ES154B Series – Datasheet

#### Bremas type: ES154BCNER


Mechanical data	
Max. torque on the screws	0,7 Nm - 6,2 in.lb
Wire section solid and stranded	1,5 mm <sup>2</sup> – AWG 16
Weight	48g
Wire strip	
Lenght	7mm
Electrical data:	
Terminal protection degree	IP 20
Rated voltage IEC	300 V AC
Rated current IEC	10 A
Rated voltage UL	300 V AC
Rated current UL	10 A
Thermal data	
Operating temperatures	-25°C + 85°C
Conformity	
RoHS compliant (Directive 2011/65/EU and Delegated Directive	

2015/863)





#### Wire locking system



# Dimensions

Measures in (mm)

### Electrical scheme

NO 34 24 -(7) (6)

32 22 3 2

● | | ● | <u>A</u>1


11 10

31 21 11 COM

6,5

12 (1)

9-

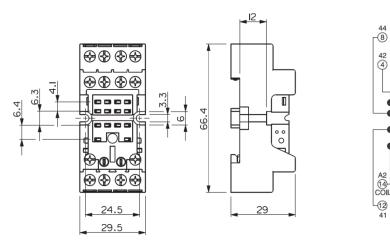



 Bremas Ersce SpA

 Via castellazzo 9 - 20040 Cambiago (MI)

 Tel +39 02 95651611

 Fax +39 02 95651639

 www.bremas.eu

 info@bremas.it

ISO 9001 Certified Quality System