

NOCTIS LUX 3

SLI029048CW_CZUJNIK_PW



See
more

Floodlight NOCTIS LUX 3, with a power of 10 W, high light efficacy 100 lm/W. It has a high IP44 rating, making it ideal for use in areas of high humidity. IK07 class provides impact resistance. It shines with a cold light (6000K). Designed for surface mounting.

IP44


IK07



Power	10 W	Voltage	230 V
Luminous flux*	1000 lm (120°)	Colour temperature	6000 K
Colour of light	CW	Beam angle	100 °
IK	07	Degree of protection (IP)	IP44


Technical data

Code	SLI029048CW_CZUJNIK_PW
Power	10 W
Nominal current	45 mA
Voltage	230 V
Energy consumption	10 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0.9
Useful luminous flux*	1000 lm (120°)
Luminous flux**	1000 lm (360°)
Lamp efficacy	100 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	100 °
RA	>70
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, GLASS
IK	07
Degree of protection (IP)	IP44
Colour	Black
Dimension (AxBxC)	114x150x53 mm
For use	Outside
Assembly method	On the ceiling
Application	EXT
Made in	PRC

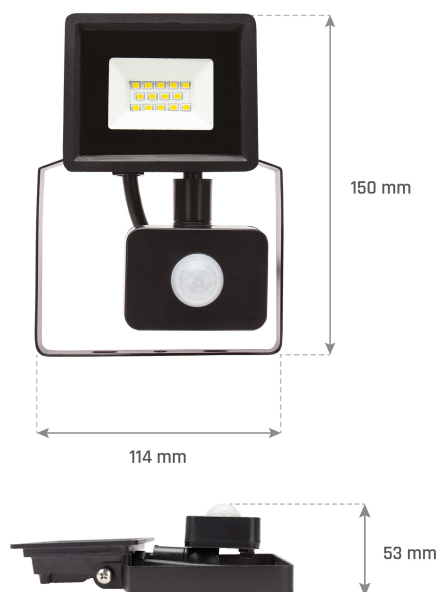

Related documents



 Declaration of Conformity



 Photometric file

