


Product Environmental Profile

**M172 Display Color TouchScreen,
Flush Mounting, Grey**



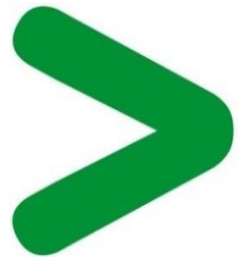

General information

Representative product

M172 Display Color TouchScreen, Flush Mounting, Grey - TM172DCLFG

Description of the product

TM172DCLFG is an HMI touchscreen keyboard suitable to control temperature, pressure, ventilation unit, heat pumps and many other loads in installations for the HVAC sector in conjunction with the Modicon M172 programmable controllers and/or any other device connected through Modbus serial communication.
The TM172DCLFG touchscreen has its own logic, which is also useful for managing a master slave systems.

Description of the range

The Modicon M172 Display is a Schneider Electric range of HMI touchscreen keyboards for managing a wide range of HVAC/R and many other applications, from the simplest to the most complex.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

Functional unit


To control the temperature by means of input probes, pressure and many other typical loads of HVAC installations and a 100% of the time for 10 years.



Constituent materials

Reference product mass

290 g including the product, its packaging and additional elements and accessories

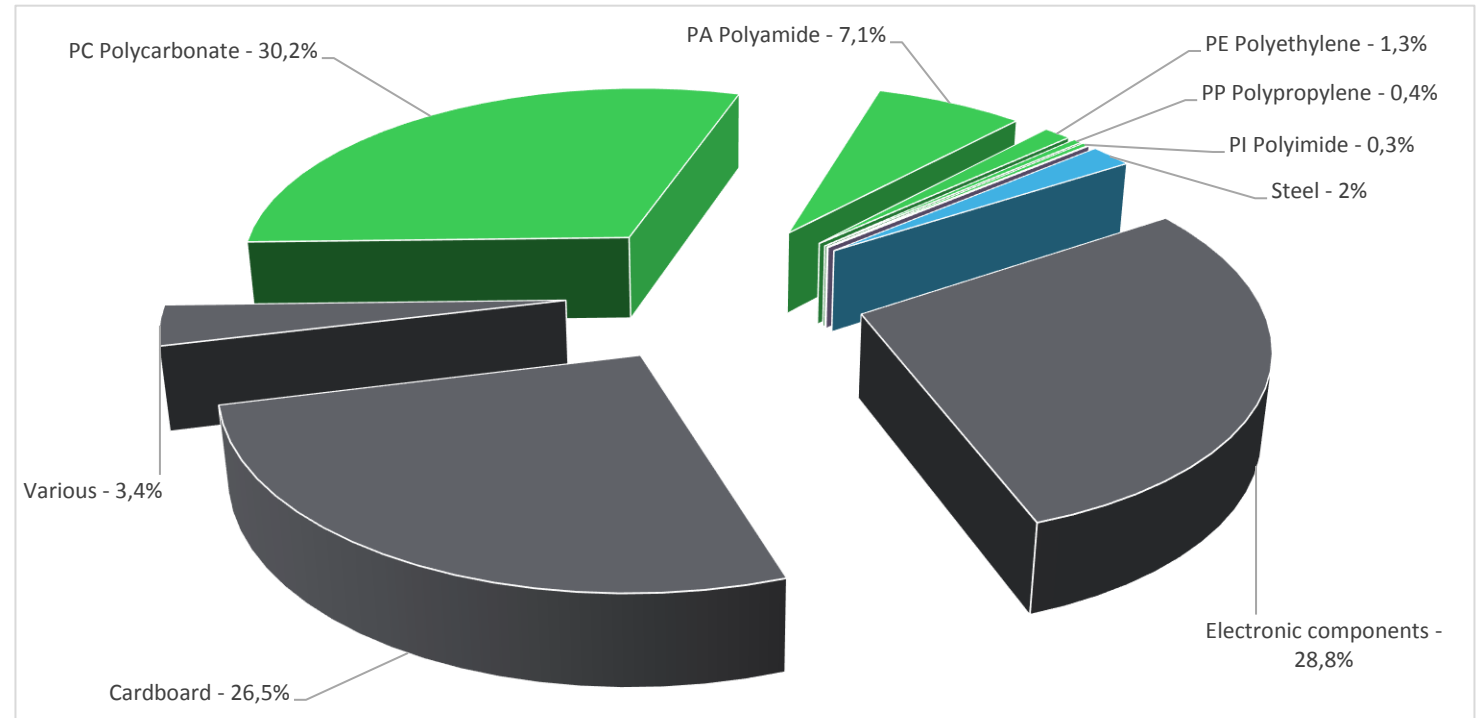

Plastics	39,3%
Metals	2,0%
Others	58,7%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The M172 Display Clr TchScr, Flush Mntng G presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 102,8 g, consisting of cardboard (76%), plastics (24%) Product distribution optimised by setting up local distribution centres
Installation	The product TM172DCLFG does not require any special installation operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains electronic cards (44,69g) and LCD display (40g). that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 7% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special components needed			
Use scenario	The product is in active mode 100% of the time with a power use of 1,3 W, for 10 years.			
Geographical representativeness	Worldwide			
Technological representativeness	TM172DCLFG is an HMI touchscreen keyboard suitable to control temperature, pressure, ventilation unit, heat pumps and many other loads in installations for the HVAC sector in conjunction with the Modicon M172 programmable controllers and/or any other device connected through Modbus serial communication. The TM172DCLFG touchscreen has its own logic, which is also useful for managing a master slave systems.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Italy	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		M172 Display Clr TchScr, Flush Mntng G - TM172DCLFG					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3,27E-03	3,26E-03	0*	0*	4,85E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	2,92E-01	5,93E-02	1,71E-04	0*	2,33E-01	7,81E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	4,75E-02	3,34E-02	3,93E-05	0*	1,41E-02	3,28E-05
Contribution to global warming	kg CO ₂ eq	1,10E+02	5,37E+01	3,74E-02	0*	5,58E+01	9,32E-02
Contribution to ozone layer depletion	kg CFC11 eq	8,07E-06	4,43E-06	0*	0*	3,63E-06	3,34E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2,11E-02	8,33E-03	1,22E-05	0*	1,28E-02	7,02E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	2,03E+02	8,18E-01	0*	0*	2,02E+02	0*
Total Primary Energy	MJ	1,85E+03	7,36E+02	5,29E-01	0*	1,11E+03	3,47E-01

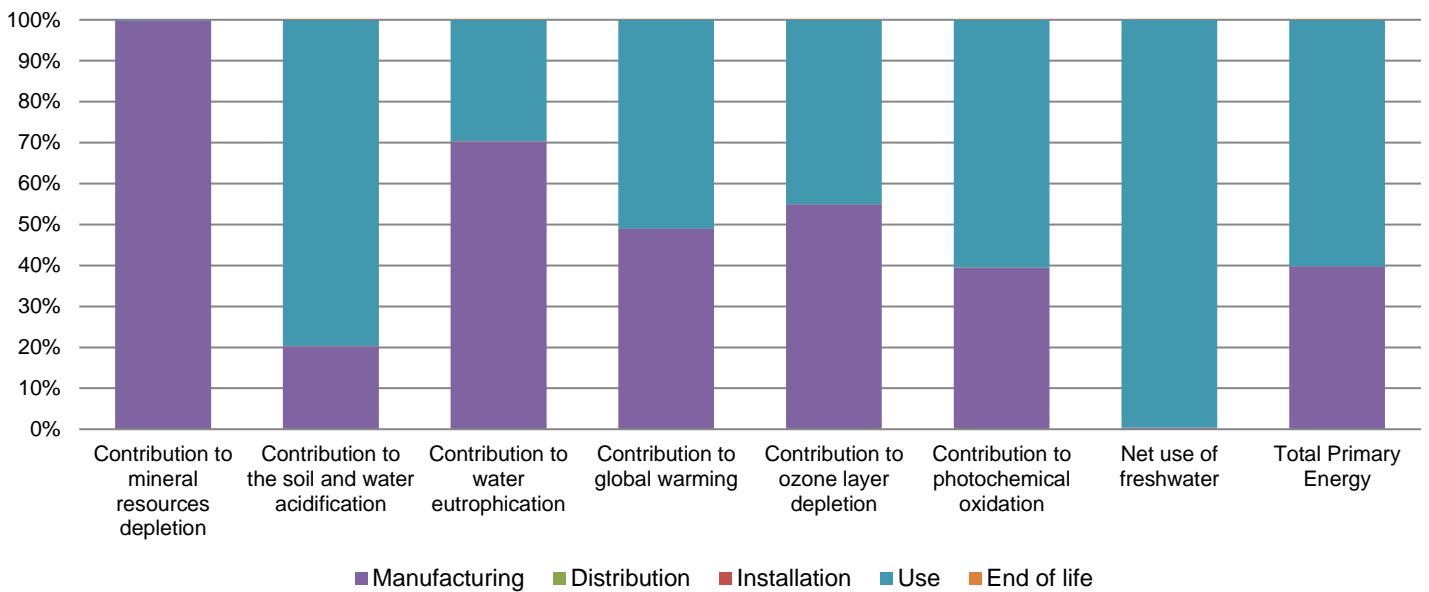

Optional indicators		M172 Display Clr TchScr, Flush Mntng G - TM172DCLFG					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,45E+03	8,11E+02	5,26E-01	0*	6,33E+02	3,22E-01
Contribution to air pollution	m ³	7,40E+03	4,99E+03	1,59E+00	0*	2,40E+03	2,53E+00
Contribution to water pollution	m ³	6,02E+03	3,70E+03	6,15E+00	0*	2,30E+03	4,54E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,21E-03	1,21E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,56E+02	1,42E+01	0*	0*	1,42E+02	0*
Total use of non-renewable primary energy resources	MJ	1,70E+03	7,21E+02	5,28E-01	0*	9,73E+02	3,46E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,54E+02	1,26E+01	0*	0*	1,42E+02	0*
Use of renewable primary energy resources used as raw material	MJ	1,61E+00	1,61E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,69E+03	7,17E+02	5,28E-01	0*	9,73E+02	3,46E-01
Use of non renewable primary energy resources used as raw material	MJ	4,73E+00	4,73E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	5,07E+01	5,03E+01	0*	2,52E-02	2,91E-02	4,13E-01
Non hazardous waste disposed	kg	2,18E+02	9,56E+00	0*	0*	2,08E+02	0*
Radioactive waste disposed	kg	1,42E-01	2,64E-03	0*	0*	1,39E-01	0*

Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1,04E-01	1,22E-02	0*	7,76E-02	0*	1,43E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,55E-02	9,09E-04	0*	1,24E-03	0*	2,34E-02
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

Depending on the impact analysis, 100% Manufacturing for mineral resources depletion, 20% manufacturing & 80% energy consumption for Soil and water acidification, 70% manufacturing & 30% energy consumption for water eutrophication, 50% manufacturing & 50% energy consumption for global warming, 55% manufacturing & 45% energy consumption for ozone layer depletion, 40% manufacturing & 60% energy consumption for photochemical oxidation, 100% energy consumption for net use of fresh water and 40% manufacturing & 60% energy consumption for total primary energy.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1803026_V1-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	03/2018		
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Eliwell Controls srl

Eliwell Technical Support

Techsuppeliwell@schneider-electric.com

+39 0437 986300

15, Via dell'Industria

32016

Alpago - Belluno

0

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1803026EN_V1

© 2018 - Schneider Electric – All rights reserved

03/2018