





LED Floodlight Modulo Performer

Item Code

CCT

kg


709000056700 / 709000056800 / 709000056900	4000K	5.3kg / 5.3kg / 5.2kg
709000057000 / 709000057100 / 709000057200	5700K	5.3kg / 5.3kg / 5.2kg
709000057300 / 709000057400 / 709000057500	4000K	5.3kg / 5.3kg / 5.2kg
709000057600 / 709000057700 / 709000057800	5700K	5.3kg / 5.3kg / 5.2kg
709000057900 / 709000058000 / 709000058100	4000K	6.5kg / 6.5kg / 6.3kg
709000058200 / 709000058300 / 709000058400	5700K	6.5kg / 6.5kg / 6.3kg
709000058500 / 709000058600 / 709000058700	4000K	6.9kg / 6.9kg / 6.8kg
709000058800 / 709000058900 / 709000059000	5700K	6.9kg / 6.9kg / 6.8kg
709000059100 / 709000059200 / 709000059300	4000K	8.7kg / 8.7kg / 8.5kg
709000059400 / 709000059500 / 709000059600	5700K	8.7kg / 8.7kg / 8.5kg
709000059700 / 709000059800 / 709000059900	4000K	8.9kg / 8.9kg / 8.7kg
709000060000 / 709000060100 / 709000060200	5700K	8.9kg / 8.9kg / 8.7kg

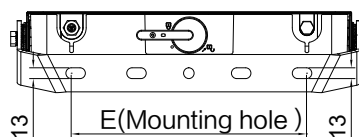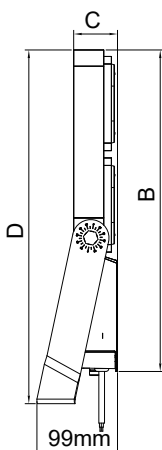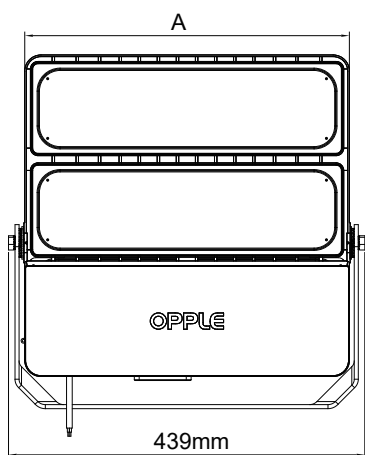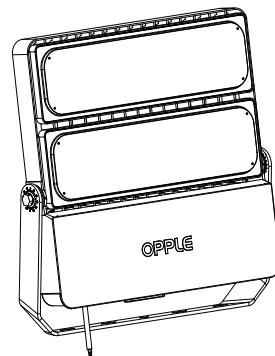

The screw should be installed in the E Mounting hole


Model	Rated Power	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Windage area (mm ²)	IP Grade
LED FLMo-P RE340-70W-XXXX-X	70W	400	271	54	330	290	108400	IP66
LED FLMo-P RE340-100W-XXXX-X	100W	400	271	54	330	290	108400	IP66
LED FLMo-P RE450-150W-XXXX-X	150W	400	396	54	436	290	158400	IP66
LED FLMo-P RE450-200W-XXXX-X	200W	400	396	54	436	290	158400	IP66
LED FLMo-P RE570-250W-XXXX-X	250W	400	521	54	564	290	208400	IP66
LED FLMo-P RE570-300W-XXXX-X	300W	400	521	54	564	290	208400	IP66


①

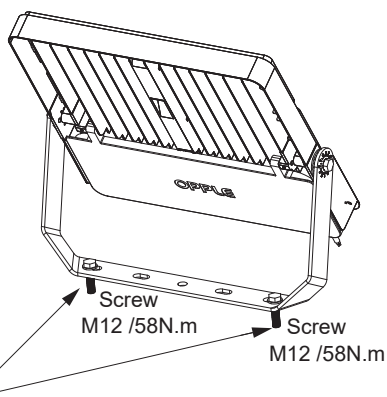

*Not included: please purchase separately.

②

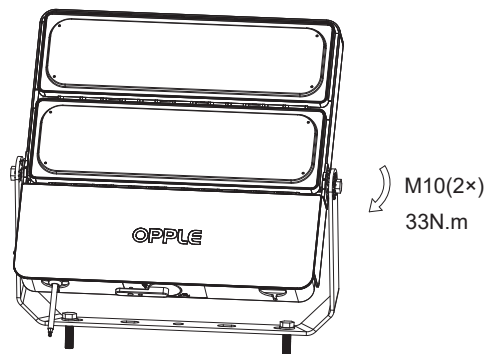

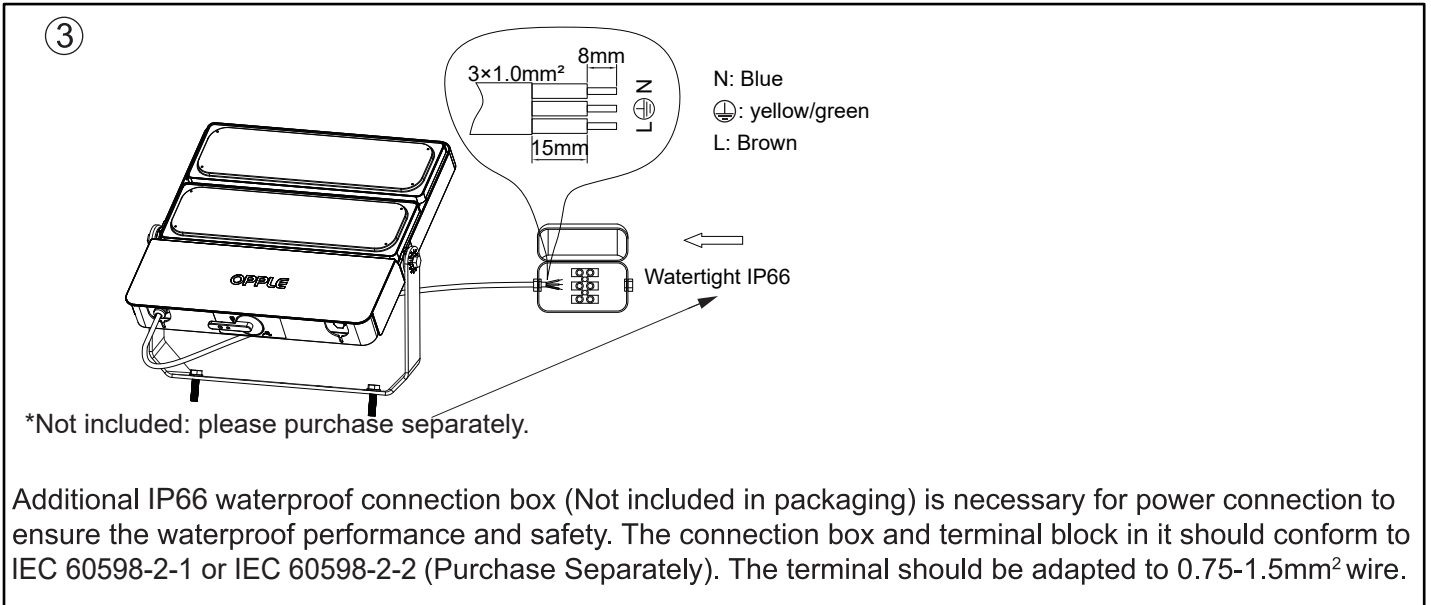

In case of broken cover the luminaire should be disposed of.




In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.

Caution: Any operation on LED module is forbidden while power-on.

Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.


Achtung: In Betrieb ist keine Arbeit am LED-Modul erlaubt.





For unreplaceable light sources, if the light source contained in this luminaire could not work properly, the luminaire should be disposed of.



0.5m Minimum distance from illuminated object.



For use in environments where normal non-conductive/conductive dust accumulation may be expected, not for use in environments with expected high/unusual dust accumulation.



Data subject to change
 Les données sont sujettes à modifications
 Änderungen vorbehalten

Suzhou Oppl Lighting Co., Ltd.
 215200
 East Side, Fenyang Road,
 Fenu Economic Development Zone,
 Wujiang City, Jiangsu Province,
 P.R.China

OPPLE Lighting B.V.
 Materiaalweg 6-6A
 5681 RJ Best
 The Netherlands
 service@opple.com
 www.opple.com