


Beacon Emergency Fixed Downlight



- LED Non-Maintained fixed polycarbonate downlight
- 3 hour emergency output
- Power and green charge LED are discreetly incorporated within the head

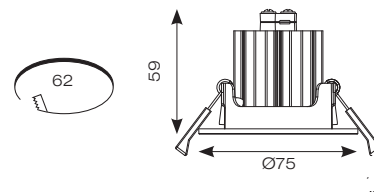

***	Escape route 2 metres wide (1 Lux minimum) *			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)	0	0	3	9.5
2.5	0	0	3.3	11
4	0	0	-	-
6				

***	Open (Anti-Panic) area (0.5 Lux Minimum) **			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)	3.5	8.9	3.5	8.9
2.5	4	11.4	4	11.4
4	4.5	12.9	4.5	12.9
6				

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 40°C	L70 50,000	120°	1	IP20	IK08

CODE	DESCRIPTION	WATTAGE	CCT	EMERGENCY MODE	TRADE
ABFLED/3NM	Non-Maintained	5W	6500K	270lm	£69.50

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASBP/9/LI	3.2V 5500mAh-5 Li-FePO4 Replacement Battery	£19.70

