

Standard 1.2 W 24 V B8.5d

NEOLUX 24 V halogen lamps provide a good view and visibility in all road conditions. The lamps are easy to replace – the 24 V standard replacement is the ideal choice for this task.



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Designed specifically for 24 V
- Lamps for exterior applications are ECE certified
- Good quality thanks to German technology
- Normed light output

Areas of application


- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Application (Category and Product specific)	Auxiliary lamp	
Application (category and rioduct specific)		
Electrical data		
Power input	1.6 W	
Test voltage	28.0 V	
Power input tolerance	±10 %	
Nominal wattage	1.20 W	
Nominal voltage	24.0 V	
Photometrical data		
Luminous flux	6.4 lm	
Luminous flux tolerance	±25 %	
	-23 78	
Dimensions & weight		
Product weight	1.18 g	
Length	23.5 mm	
Diameter	5 mm	
Lifespan		
Lifespan Tc	1000 h	
Lifespan B3	250 h	
Additional product data		
Base (standard designation)	B8.5d	
Certificates & standards		
British standard	508T	
Logistical data		
Order reference	N508T	
Environmental information		
Date of Declaration	19-01-2022	
	4008321769503	
Primary Article Identifier		
Primary Article Identifier	4062172077569	
·	4055462251848	
Primary Article Identifier Candidate List Substance 1	•	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N508T	4008321769503	Folding box	10

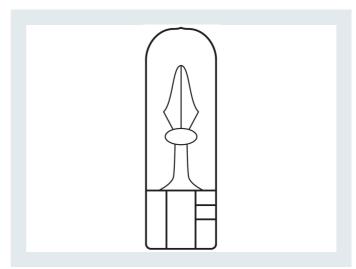



www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 6 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020