Product Environmental Profile


Exxact Surface Mounted Boxes







Ceneral information Representative product Exxact Full cover surface mounted box 1 module high white - WDE015761 Description of the product The main function of the surface mounted boxes is to facilitate housing for different wiring devices in buildings. Functional unit Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure following dimensions 47 x 86 x 86, and the penetration of solid objects and liquids (IP20 / IP21) protection in accordance with the standard IEC 60529..

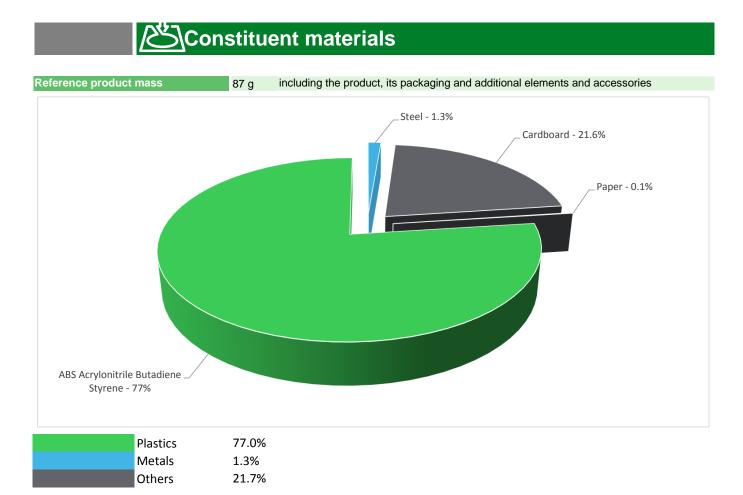

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

	The Exxact Surface Mounted Boxes presents the following relevent environmental aspects				
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified				
	Weight and volume of the packaging optimized, based on the European Union's packaging directive				
Distribution	Packaging weight is 18.8 g, consisting of cardboard (99.46%), paper (0.54%)				
	Product distribution optimised by setting up local distribution centres				
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials is accounted during the installation phase (including transport to disposal).				
Use	The product does not require special maintenance operations.				
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials				
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.				
	Recyclability potential: 74% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).				

P Environmental impacts

Reference life time	20 years					
Product category	Unequipped enclosures and cabinets					
Installation elements	No special components needed					
Use scenario	Non applicable for unequipped enclosures and cabinets					
Geographical representativeness	Nordic countries: Sweden, Finland, Norway					
Technological representativeness	The main function of the surface mounted boxes is to facilitate housing for different wiring devices in buildings.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Manufacturing plant: Elda, Poland	Electricity grid mix; AC; consumption mix, at consumer; 230V; SE	No energy consumption	Electricity grid mix; AC; consumption mix, at consumer; 230V; SE		

Compulsory indicators	Exxact Surface Mounted Boxes - WDE015761						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.58E-06	1.58E-06	4.49E-10	0*	0*	2.02E-10
Contribution to the soil and water acidification	$kg SO_2 eq$	1.26E-03	1.19E-03	5.13E-05	1.26E-06	0*	1.99E-05
Contribution to water eutrophication	kg PO4 ³⁻ eq	1.98E-04	1.31E-04	1.18E-05	5.02E-05	0*	5.09E-06
Contribution to global warming	kg CO_2 eq	3.90E-01	3.44E-01	1.12E-02	2.59E-02	0*	8.35E-03
Contribution to ozone layer depletion	kg CFC11 eq	2.03E-08	1.98E-08	2.27E-11	6.46E-11	0*	4.30E-10
Contribution to photochemical oxidation	kg C_2H_4 eq	1.25E-04	1.13E-04	3.66E-06	6.20E-06	0*	2.12E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	6.24E-02	6.24E-02	0*	0*	0*	8.44E-06
Total Primary Energy	MJ	9.00E+00	8.74E+00	1.59E-01	5.11E-03	0*	9.87E-02

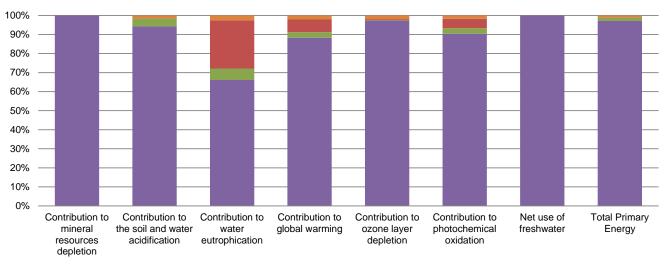

■ Manufacturing ■ Distribution ■ Installation ■ Use ■ End of life

Optional indicators	Exxact Surface Mounted Boxes - WDE015761						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7.54E+00	7.30E+00	1.58E-01	3.74E-03	0*	7.93E-02
Contribution to air pollution	m³	1.52E+01	1.39E+01	4.78E-01	8.98E-02	0*	7.05E-01
Contribution to water pollution	m³	1.36E+02	1.32E+02	1.85E+00	1.39E+00	0*	7.97E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.58E-06	4.58E-06	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	6.20E-01	6.20E-01	2.12E-04	0*	0*	1.10E-04
Total use of non-renewable primary energy resources	MJ	8.38E+00	8.12E+00	1.59E-01	5.10E-03	0*	9.86E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.33E-01	2.33E-01	2.12E-04	0*	0*	1.10E-04
Use of renewable primary energy resources used as raw material	MJ	3.87E-01	3.87E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.33E+00	5.07E+00	1.59E-01	5.10E-03	0*	9.86E-02
Use of non renewable primary energy resources used as raw material	MJ	3.05E+00	3.05E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.21E-01	1.36E-01	0*	0*	0*	8.54E-02
Non hazardous waste disposed	kg	3.78E-01	3.59E-01	3.99E-04	1.88E-02	0*	3.04E-04
Radioactive waste disposed	kg	2.73E-04	2.72E-04	2.84E-07	3.58E-08	0*	4.72E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	6.04E-02	1.00E-02	0*	0*	0*	5.03E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	7.63E-04	9.70E-05	0*	0*	0*	6.67E-04
Exported Energy	MJ	5.73E-05	0*	0*	5.73E-05	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

SCHN-00435-V01.01-EN - PEP ECOPASSPORT® - Exxact Surface Mounted Boxes

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00435-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02			
Verifier accreditation N°	VH33	Supplemented by	PSR-0005-ed2-EN-2016 03 29			
Date of issue	02/2019	Information and reference documents	www.pep-ecopassport.org			
		Validity period	5 years			
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010						
Internal	External X					
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)						
PEP are compliant with XP C08-100-1 :2014						
The elements of the present PEP cannot be compared with elements from another program						
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »						
Schneider Electric Industries SAS						
Country Customer Care Center						
http://www.schneider-electric.com/contact						

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00435-V01.01-EN

Published by Schneider Electric

© 2017 - Schneider Electric - All rights reserved

02/2019