Hawk Universal Lithium Emergency Kit












- Ultra-slim universal self-test emergency convertor pack for LED luminaires
- Supplied c/w recessed LED indicator housing
- Ideal for most LED panels, Downlights and Linear products
- Compatible for LED luminaires with separate LED driver (Maximum 60V Forward Voltage)
- LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime







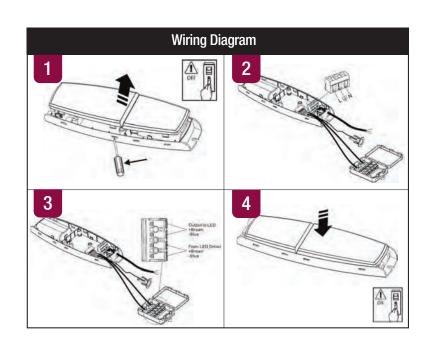

| Load Voltage | 18V | 23V | 28V | 33V | 38V | 43V | 48V | 53V | 54V | 55V | 56V | 60V |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Out Current | 59mA | 60mA | 60mA | 62mA |
| Out Wattage | 1.06W | 1.38W | 1.68W | 2.05W | 2.36W | 2.67W | 2.98W | 3.29W | 3.35W | 3.41W | 3.47W | 3.70W |

| CODE | DESCRIPTION | CLASS | IP | TRADE |
|-------------|--|-------|------|--------|
| AHUEMKIT/LI | Maintained/Non-maintained - Universal Emergency Pack | 1 | IP20 | £87.50 |