Pressure - Dry Differential Analog EP Series, Bluetooth® Enabled





Product Description

The SpaceLogic EP Series pressure sensor can measure either air pressure or velocity with the flip of a switch. The EP is available in three installation configurations: duct, panel or universal. Duct and panel models have two pressure and velocity options: 0-1 in. WC / 0-3,000 ft/min or 1-10 in. WC / 3,000-6,000 ft/min with four field-selectable sub-ranges. The universal model comes in one pressure/ velocity range: 0-10 in. WC / 0-7,000 ft/min with seven field-selectable sub-ranges for pressure and eight for velocity. All variants are available with and without display. The EP has an IP65/ NEMA 4 environmental rating and a 5-year limited warranty.

The Veris Sensors App provides the ability to connect to a device and configure a variety of field-selectable parameters remotely from a smartphone via Bluetooth® wireless technology. The app allows users to create and store commonly used parameters that will reduce commissioning time and provide assurance that all parameters are properly configured with no call backs. The app can also create a trend log while connected, providing critical data for troubleshooting purposes. iOS® users can download the app through the iOS App Store on their smart device. Android users

can download the app through the Google Play™ store. For instructions on downloading and operating the app, see the Veris Sensors App User Guide or Veris Sensors App Quick Start Guide available on the Veris Industries website at www.veris.com.

Available Products

Enclosure	Range	Local Display
EP		口
D = Duct P = Panel	301 = <u>Pressure</u> : 0 to 1 in. WC 0 to 250 Pa <u>Velocity</u> : 0 to 3,000 ft/mi 0 to 15 m/s	Blank = No Display LCD = LCD Display
	302 = <u>Pressure</u> : 0 to 10 in. WC 0 to 2,500 Pa <u>Velocity</u> : 0 to 6,000 ft/mi 0 to 30 m/s	n
Enclosure	Range	Local Display
EP U	305	口
U = Universal	305 = <u>Pressure</u> : 0 to 10 in. WC 0 to 2,500 Pa	Blank = No Display LCD = LCD Display

Velocity: 0 to 7,000 ft/min 0 to 35 m/s

Schneider Electric

© 2021 Schneider Electric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA, All rights reserved. All trademarks are owned by Schneider Z207540-0K

SpaceLogic Sensors, EP Series Installation Instructions

schneider-electric.com | 3


Specifications (cont.)

Bluetooth Frequency Range	2.402 to 2.480 GHz (Bluetooth version 4.2), enabled by DIP switch
Maximum Output Power	0 dBm
Environmental Rating	IP65, NEMA 4
Flammability Rating	UL 94 5VA fire retardant ABS, plenum rated
Limited Warranty	5 years

EMC Conformance: EN 61000-6-3 and A1, Class B, EN 61000-6-1, EN61326-1 and EN61326-2-3.

*** For measured values between 200 and 7000 ft/min (1 and 35 m/s). *** Display will not function below 0 °C (32 °F).

Dimensions

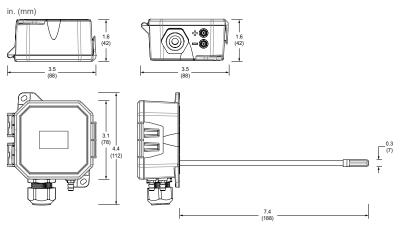

Electric Industries SAS or its affiliated companies. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

Safety Precautions

NOTICE

- · This product is not intended for life or safety applications.
- · Do not install this product in hazardous or classified locations
- · Read and understand the instructions before installing this product. • Turn off all power supplying equipment before
- working on it.
- · The installer is responsible for conformance to all applicable codes.

If this product is used in a manner not specified by the manufacturer, the protection provided by the product may be impaired. No responsibility is assumed for the manufacturer for any consequences arising out of the use of this material.

and any use of such marks is under license

Schneider Electric

© 2021 Schneider Electric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA. All rights reserved. All trademarks are owned by Schneider

Media Compatibility	Dry or inert gas
Input Power	Three-wire Volt mode: 24 Vac or 12-30 Vdc*, Two-wire mA mode: 12-30 Vdc*
Output Power	Field-selectable: 2-wire, loop-powered 4-20 mA Minimum input voltage for 4 to 20 mA operation: 250 Ω loop = 12 Vdc; 500 Ω loop = 19 Vdc (DC only, clipped and capped), 24 Vac/dc or 3-wire 0-5V/0-10V Minimum load resistance for Volt operation: 5 k Ω
301 Pressure Range	Pressure mode: Unidirectional: 0.1/0.25/0.5/1 in. WC, switch selectable Bidirectional: ±0.1/±0.25/±0.5/±1 in. WC, switch selectable Unidirectional: ±25/50/100/250 Pa, switch selectable Bidirectional: ±25/±50/±100/±250 Pa, switch selectable Velocity mode: 500/1,000/2,000/3,000 ft/min, 2.5/5/10/15 m/s
302 Pressure Range	Pressure mode: Unidirectional: 1.0/2.5/5/10 in. WC, switch selectable Bidirectional: ±1.0/±2.5/±5/±10 in. WC, switch selectable Unidirectional: 250/500/1,000/2,500 Pa, switch selectable Bidirectional: ±250/±500/±1,000/±2,500 Pa, switch selectable Velocity mode: 3,000/4,000/5,000/6,000 ft/min, 15/20/25/30 m/s
305 Pressure Range	Pressure mode: Unidirectional: 0.1/0.25/0.5/1/2.5/5/10 in. WC, switch selectable Bidirectional: ±0.1/±0.25/±0.5/±1/±2.5/±5/±10 in. WC, switch selectable Unidirectional: ±25/50/100/250/500/1,000/2,500 Pa, switch selectable Bidirectional: ±25/±50/±100/±250/±500k/±1,000/±2,500 Pa, switch selectable Velocity mode: 500/1,000/2,000/3,000/4,000/5,000/6,000/7,000 ft/min, 2.5/5/10/15/20/25/30/35 m/s
Response Time	Standard: T95 in 20 sec, Fast: T95 in 2 sec, DIP switch selectable
Mode	Unidirectional or bidirectional, DIP switch selectable
Display (Option)	Pressure mode: Signed 3-1/2 digit LCD, indicates pressure, overrange indicator Velocity mode: Signed 4-1/2 digit LCD, indicates velocity, overrange indicator
Proof Pressure	3 psid (20,600 Pa)
Burst Pressure	5 psid (34,500 Pa)
Pressure Mode Accuracy	±1% FS (combined linearity and hysteresis)
Velocity Mode Accuracy	±90 ft/min (±0.45 m/s) plus 5% of measured value**
Temperature Effect	1 in. WC (250 Pa) models: 0.05%/°C; 10 in. WC (2,500 Pa) models: 0.01%/°C (Relative to 25 °C), 0 to 50 °C (32 to 122 °F)
Zero Drift (1 year)	1 in. WC (250 Pa) models: 2.5% FS typ.; 10 in. WC (2,500 Pa) models: 0.25% FS typ.
Zero Adjust	Pushbutton auto-zero and digital input (2-position terminal block)
Operating Environment	-20 to 60 °C (-4 to 140 °F)***
Altitude of Operation	0 to 3,000 m
Pollution Degree	2
Humidity Range	100% RH, non-condensing
Mounting Location	For indoor or outdoor use (display will not function below 0 °C (32 °F))
Fittings	Brass barb; 0.24" (6.1 mm) o.d.
Suggested Cable	Shielded: Belden #9939 (22 AWG) 3-wire multi-conductor (or similar) Belden #9940 (22 AWG) 4-wire multi-conductor (or similar) Belden #9939 (22 AWG) 5-wire multi-conductor (or similar) Unshielded: Belden #8443 (22 AWG) 3-wire multi-conductor (or similar) Belden #8444 (22 AWG) 4-wire multi-conductor (or similar) Belden #8445 (22 AWG) 5-wire multi-conductor (or similar)

Asia: +65 6484 7877 www.schneider-electric.com

Schneider


© 2021 Schneider Electric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA. All rights reserved. All trademarks are owned by Schneide Electric Industries SAS or its affiliated companies. The Bluetooth word mark and logos are registered trademarks owned by Blueto and any use of such marks is under license.

SpaceLogic Sensors, EP Series Installation Instructions

schneider-electric.com | 4

Installation, Wiring & Configuration

1. Plan the installation. Panel or duct mount?

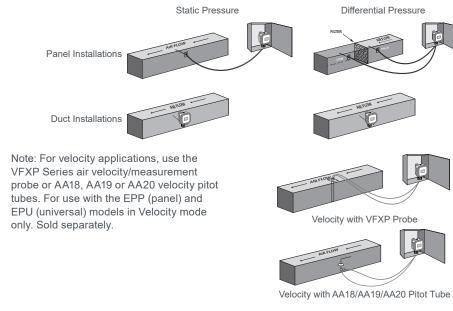


- 2. For duct mount applications, thread the probe into the back of the device housing as shown in the dimensional drawing
- 3. Configure the internal tubing for the selected installation method as described below.


Duct mount tubing configuration:

- a. Connect the right-side tube to the rear brass barb marked as "-" on the underside of the device housing.
- b. Connect the left-side tube to the probe in the back of the device housing

Panel mount tubing configuration:

- a. Connect the right-side tube to the rear brass barb marked as "-" on the underside of the device housing.
- b. Connect the left-side tube to the front brass barb marked as "+" on the underside of the device housing.






Tubing for Panel




© 2021 Schneider Electric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA. All rights reserved. All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license

4. Mount the transducer (see the screw hole diagram below).



5. For applications using conduit, remove the cable gland nut on the bottom of the unit. Thread a standard 1/2-in. NPT female threaded coupler onto the body of the cable gland. Connect the opposite end of the coupler to the conduit.



6. Set DIP switches to desired settings.*

DIP Switch 1: Scale ON = Pascal (m/s) OFF = In. WC (ft/min) DIP Switch 2: Mode

ON = Velocity OFF = Pressure

DIP Switch 3: Direction* * ON = Unidirectional OFF = Bidirectional

DIP Switch 4: Response

ON = Slow OFF = Fast

DIP Switch 5: Output ON = 4-20 mA

OFF = Voltage

DIP Switch 6: Volt Scale ON = 0-5 Vdc

OFF = 0-10 Vdc DIP Switch 7: Bluetooth

ON = Disabled

OFF = Enabled

DIP Switch 8: Unused

*DIP switches are all set to OFF by the factory *Velocity mode is unidirectional regardless of DIP switch setting.

DIP Switch Settings

	Scale	Mode	Direction	Response	Output	Volt Scale	Bluetooth	Unused
ON	Pascal / m/s	Velocity	Uni	Slow	mA	5V	Disabled	Unused
OFF	In. WC / ft/min	Pressure	Bi	Fast	Volt	10V	Enabled	Unused
	1	2	3	4	5	6	7	8

Schneider Electric

schneider-electric.com | 7


© 2021 Schneider Electric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA, All rights reserved. All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies. The Bluetooth word mark and logos are registered trademarks owned by Bluet Z207540-0K

SpaceLogic Sensors, EP Series Installation Instructions


Installation, Wiring & Configuration (cont.)

8. Connect the transmitter to the control system and power supply as indicated below. Optional: Connect the ZERO terminals to the digital output (contact closure) of the control system.

2-wire, 4-20 mA Current Loop Output



3-wire, 0-5 V/0-10 V Voltage Output



9. Wait five seconds, then press and hold the ZERO pushbutton for two seconds or provide contact closure on the AUX ZERO terminal. This will reset the output and display to zero pressure. For best accuracy. press the ZERO button while both ports are open to atmospheric pressure. To protect the unit from accidental zero, this feature is enabled only when the detected pressure is within about 0.5 in. WC (125 Pa) of factory calibration

www.schneider-electric.com

and any use of such marks is under license

Connect desired external tubing to the

device.

Schneider **Electric**

© 2021 Schneider Electric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA. All rights reserved. All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. Installation, Wiring & Configuration (cont.)

7. Set rotary switch to desired range setting. Align the arrow (not the slot) on the rotary switch to the desired full-scale range. LCD models momentarily indicate the selected range

Rotary Switch Settings

Range 01 Model, Field Selectable (WC / ft/min or Pa / m/s)

(P)	Pressure Mode	(V)	Velocity Mode
0	0 to 0.1 in. WC	0	0 to 500 ft/min
1	0 to 0.25 in. WC	1	0 to 1,000 ft/min
2	0 to 0.5 in. WC	2	0 to 2,000 ft/min
3	0 to 1 in. WC	3	0 to 3,000 ft/min
4	0 to 0.1 in. WC	4	0 to 500 ft/min
5	0 to 0.25 in. WC	5	0 to 1,000 ft/min
6	0 to 0.5 in. WC	6	0 to 2,000 ft/min
7	0 to 1 in. WC	7	0 to 3,000 ft/min
(P)	Pressure Mode	(V)	Velocity Mode
(P)	O to 25 Pa	(V)	0 to 2.5 m/s
		. ,	
0	0 to 25 Pa	0	0 to 2.5 m/s
0	0 to 25 Pa 0 to 50 Pa	0	0 to 2.5 m/s 0 to 5 m/s
0 1 2	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa	0 1 2	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s
0 1 2 3	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa 0 to 250 Pa	0 1 2 3	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s 0 to 15 m/s
0 1 2 3 4	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa 0 to 250 Pa 0 to 25 Pa	0 1 2 3 4	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s 0 to 15 m/s 0 to 2.5 m/s
0 1 2 3 4 5	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa 0 to 250 Pa 0 to 25 Pa 0 to 50 Pa	0 1 2 3 4 5	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s 0 to 15 m/s 0 to 2.5 m/s 0 to 5 m/s

Range 02 Model, Field Selectable (WC / ft/min or Pa / m/s)

(P)	Pressure Mode
0	0 to 1 in. WC
1	0 to 2.5 in. WC
2	0 to 5 in. WC
3	0 to 10 in. WC
4	0 to 1 in. WC
5	0 to 2.5 in. WC
6	0 to 5 in. WC
7	0 to 10 in. WC

(V)	Velocity Mode
0	0 to 3,000 ft/min
1	0 to 4,000 ft/min
2	0 to 5,000 ft/min
3	0 to 6,000 ft/min
4	0 to 3,000 ft/min
5	0 to 4,000 ft/min
6	0 to 5,000 ft/min
7	0 to 6,000 ft/min

Range 02 Model (cont.)

	, , ,		
(P)	Pressure Mode	(V)	Velocity Mode
0	0 to 250 Pa	0	0 to 15 m/s
1	0 to 500 Pa	1	0 to 20 m/s
2	0 to 1,000 Pa	2	0 to 25 m/s
3	0 to 2,500 Pa	3	0 to 30 m/s
4	0 to 250 Pa	4	0 to 15 m/s
5	0 to 500 Pa	5	0 to 20 m/s
6	0 to 1,000 Pa	6	0 to 25 m/s
7	0 to 2 500 Pa	7	0 to 30 m/s

Range 05 Model, Field Selectable (P) Pressure or (V) Velocity Mode Field Selectable (WC / ft/min or Pa / m/s)

(P) Pressure Mode

0 0 to 0.1 in. WC

1	0 to 0.25 in. WC	1	0 to 1,000 ft/min
2	0 to 0.5 in. WC	2	0 to 2,000 ft/min
3	0 to 1 in. WC	3	0 to 3,000 ft/min
4	0 to 2.5 in. WC	4	0 to 4,000 ft/min
5	0 to 5 in. WC	5	0 to 5,000 ft/min
6	0 to 10 in. WC	6	0 to 6,000 ft/min
7	0 to 10 in. WC	7	0 to 7,000 ft/min
(P)	Pressure Mode	(V)	Velocity Mode
(,)	i icasaic moac	(- /	voicoity inouo
0	0 to 25 Pa	0	0 to 2.5 m/s
		. ,	
0	0 to 25 Pa	0	0 to 2.5 m/s
0	0 to 25 Pa 0 to 50 Pa	0	0 to 2.5 m/s 0 to 5 m/s
0 1 2	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa	0 1 2	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s
0 1 2 3	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa 0 to 250 Pa	0 1 2 3	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s 0 to 15 m/s
0 1 2 3 4	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa 0 to 250 Pa 0 to 500 Pa	0 1 2 3 4	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s 0 to 15 m/s 0 to 20 m/s
0 1 2 3 4 5	0 to 25 Pa 0 to 50 Pa 0 to 100 Pa 0 to 250 Pa 0 to 500 Pa 0 to 1,000 Pa	0 1 2 3 4 5	0 to 2.5 m/s 0 to 5 m/s 0 to 10 m/s 0 to 15 m/s 0 to 20 m/s 0 to 25 m/s

7	0 to 7,000 ft/min
(V)	Velocity Mode
0	0 to 2.5 m/s
1	0 to 5 m/s
2	0 to 10 m/s
3	0 to 15 m/s
4	0 to 20 m/s
5	0 to 25 m/s
6	0 to 30 m/s

(V) Velocity Mode

0 0 to 500 ft/min

Schneider

schneider-electric.com | 8

© 2021 Schneider Flectric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA, All rights reserved. All trademarks are owned by Schneide Electric Industries SAS or its affiliated companies. The Bluetooth word mark and logos are registered trademarks owned by Blueto

SpaceLogic Sensors, EP Series Installation Instructions

Operation

EP Series devices employ high performance sensors and sophisticated temperature compensation circuitry. The sensor achieves its best accuracy after an initial warm-up period. During the first few minutes of operation, readings at zero pressure and the lowest pressure ranges appear erroneous. Following this initial warm-up period, the EP device maintains its specified accuracy and stability.

LCD Display: The display momentarily indicates range 'SET' when a selection is made. Pressure is normally indicated on the display. Units are in inches water column (in. WC). Pascals (Pa) or kilopascals (kPa) as indicated on the display. The display shows 'OVER' when

the pressure is over range.

China RoHS Compliance Information

部件名称	有害物质 - Hazardous Substances							
Part Name	铅 (Pb)	铅 (Pb)						
电子件 Electronic	х	0	0	0	0	0		

本表格依据SJ/T11364的规定编制。

O: 表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。

X: 表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。 (企业可在此处,根据实际情况对上表中打 ×:的技术原因进行进一步说明。)

This table is made according to SJ/T 11364.

O: indicates that the concentration of hazardous substance in all of the homogeneous materials for this part is below the limit as stipulated in GB/T 26572.

X: indicates that concentration of hazardous substance in at least one of the homogeneous materials used for this part is above the limit as stipulated in GB/T 26572

Z000057-0B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme aux normes d'exemption de licence RSS d'Industry Canada. Son fonctionnement est soumis aux deux conditions suivantes : (1) cet appareil ne doit pas causer d'interférence et (2) cet appareil doit accepter toute interférence, notamment les interférences qui peuvent affecter son fonctionnement.

www.schneider-electric.com

Schneider Electric

© 2021 Schneider Electric, 12345 SW Leveton Drive, Tualatin, OR 97062 USA. All rights reserved. All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license