

AB-B4-M12-4-5,0PUR



Description

- Sensor/actuator box
- Connection methods: quick locking without LED pluggable master cable connection and double-occupied slots
- slots: 8





Number of slots:	8
Nominal voltage U : _N	120 V
Max. current carrying capacity per path:	2 A
Total current:	1x10 A
Total rated current (for electrical isolation):	2x8 A
Connection type:	pluggable master cable connection
Current carrying capacity per slot:	4 A
Number of poles:	5
Degree of protection:	IP65/IP67/IP69K
Status display:	no
Inflammability class acc. to UL 94:	V0
Contact surface material:	Gold-plated
Material, O-ring:	NBR
Material of the moulding mass:	PUR
Material of threaded sleeve:	Zinc die-cast
Material of threaded sleeve surface:	Nickel-plated
Tightening torque slot sensor/actuator cable:	0.4 Nm
Tightening torque screw plug:	0.4 Nm

Conductor data

Slot/position = Wire colour or connection:	1/4	(A) = 1 / 4
	. , .	(,,, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,


Creator: FELI1/PDP	Document: DB22260010EN	Dogo 1 of 2
Released: IVSE1/PDP	Version: 04	Page 1 of 3
We reserve all rights according to DIN ISO 16016		




Valid from: 17.09.2018

AB-B4-M12-4-5,0PUR

Technical drawing



Circuit diagram

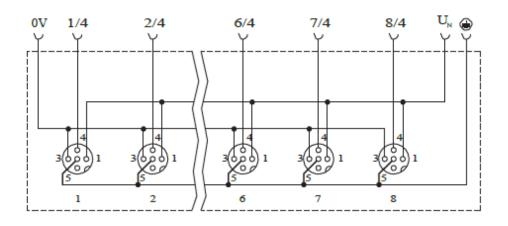


Creator: FELI1/PDP	Document: DB22260010EN	Page 2 of 2	
Released: IVSE1/PDP	Version: 04	Page 2 of 3	
We recent a all rights according to DIN ICO 40040			



Valid from: 17.09.2018

Schema drawings



Pin assignment

Slot/ position = Wire color or connection

1 / 4 (A) = WH 2 / 4 (A) = GN 3 / 4 (A) = YE 4 / 4 (A) = GY 1-4 / 1 (+ 120 V) = BN 1-4 / 3 (0 V) = BU 1-4 / 5 (PE) = GN/YE

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP	Document: DB22260010EN	Dage 2 of 2	
Released: IVSE1/PDP	Version: 04	Page 3 of 3	
We reserve all rights according to DIN ISO 16016.			